


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G01C 21/00		A1	(11) International Publication Number: WO 98/59215
			(43) International Publication Date: 30 December 1998 (30.12.98)
<p>(21) International Application Number: PCT/US98/12829</p> <p>(22) International Filing Date: 19 June 1998 (19.06.98)</p> <p>(30) Priority Data: 08/879,955 20 June 1997 (20.06.97) US</p> <p>(71) Applicant (for all designated States except US): CALCAR ADVERTISING, INC. [US/US]; Suite 139, 122 South El Camino Real, San Clemente, CA 92672 (US).</p> <p>(72) Inventors; and</p> <p>(75) Inventors/Applicants (for US only): OBRADOVICH, Michael, L. [US/US]; 1904 Avenida Salvador, San Clemente, CA 92672 (US). DINKEL, John [US/US]; 20 Glenn, Irvine, CA 92720 (US). KENT, Michael [US/US]; 12181 Marble Circle, Garden Grove, CA 92643 (US).</p> <p>(74) Agent: WARD, Richard, J., Jr.; Christie, Parker & Hale LLP, P.O. Box 7068, Pasadena, CA 91109-7068 (US).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</p>	

(54) Title: MAP DOWNLOADING SYSTEM WITH GPS AND TRANSCEIVER

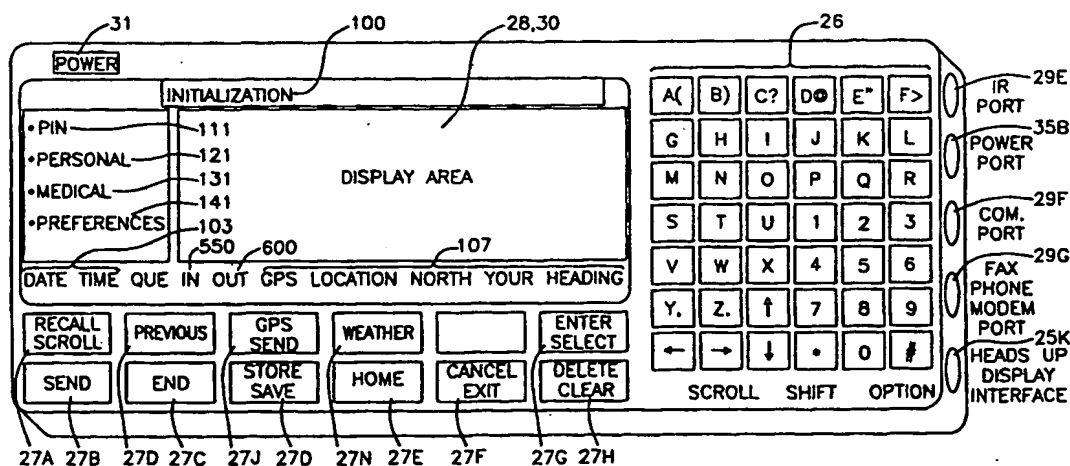

(57) Abstract

A personal communication device (PCD) with electromagnetic communication capability has a GPS receiver and display (28, 30). The PCD requests maps and location tagged data from data providers and for display on the PCD. The data providers respond to requests by searching and sorting schemes to interrogate data bases and then automatically transmit data responsive to the requests to the requesting PCD.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

"Map Downloading System with GPS and Transceiver".

FIELD OF THE INVENTION

The invention relates generally to a system for communicating data including global-positioning-encoded information. In particular, the present invention relates specifically to a device and system for communicating and retrieving position and position related data.

BACKGROUND OF THE INVENTION

Availability of up-to-date information is more important today than ever before and this will continue to be true for the foreseeable future. People want to be well informed, so much so that they travel with cellular phones, beepers, and even portable hand-held Global Positioning System (GPS) satellite receivers.

GPS capable devices generally have a GPS receiver for receiving satellite signals from the GPS satellite network that allow for determination of the device's position. Such devices allow for precisely locating the device in terms of latitude and longitude using the GPS receiver. Some devices have map data stored in memory and a display for showing the device position with reference to the map data. Other devices have no underlying map data base for reference. Rather, they show only the geographic coordinates of the device's location. These coordinates may be referred to as waypoints. Most GPS receiver devices can store many waypoints. Some GPS receiver devices can plot and display a trail of waypoints and store this trail for future retrieval. Sophisticated devices may compute the device's heading, speed, and other information based on comparisons with previous GPS determined positions.

GPS receiver devices with map display capability may store the map information on computer diskettes, CD-ROM's, or other computer memory storage devices. The device location may then be displayed on a display terminal with reference to a map stored in the computer memory storage device. The available quantity of map data, however, can overwhelm the memory capability of easily portable computer devices. This problem is exacerbated when additional information is included and linked with the map data. In addition, information is more valuable when it is up to date and available at the time of consumption, and such devices do not incorporate a means for updating the stored information. By way of example, a CD ROM could never maintain an up-to-date list of every 5-star restaurant.

Some GPS receiver devices have the ability to communicate over a telecommunications network. These devices do not provide for automatic or semi-automatic dynamic exchange of on-line position dependent or related information. In addition, these devices cannot communicate with third parties in the absence of a uniform data format standard. For example,

1

5

a cellular-phone-based system comprising GPS location information working in conjunction with proprietary Public Safety Answering Point (PSAP) telephone equipment is known. The device provides personal and medical information on an emergency basis to the proper authorities. Such a device does not allow third parties to communicate, tag, interrogate, limit, designate, modify or share this information amongst themselves for any other use.

10

15

To that end, the ability to receive digital data structures with GPS encoding, and storing this information for eventual use or broadcast to third parties, would be valuable. Today, the U.S. and several other countries have independent publishers busily GPS mapping everything down to the most minute detail. Most of these data bases are available on CD ROM storage. The problem is that no one data base can contain enough information to fulfill the unique requests of every particular and picky consumer. The costs associated with providing and maintaining such a large data base would be overwhelming and over-burdening. Additionally, most consumers do not like reading or compiling vast data bases.

SUMMARY OF THE INVENTION

20

25

30

The system of the present invention comprises Personal Communications Devices (PCDs), and traditional computer systems with GPS engines, routers, and other application programs to request, process, and transmit tagged GPS encoded information. The system, with related applications, can be accessed by device users, traditional computer users, web-site users (cyberspace), data publishers, public or private enterprises or individuals, by means of application programs. The tagged GPS encoded data files can be stored or sent via communication links using AM, FM, spread spectrum, microwave, laser or light beam in free or fiber optic, line-of-sight, reflected, satellite, secure or non-secure, or any type of communications between multiple points that the application or the state-of-the-art may allow. The system is a waypoint tag and interrogation system using various protocols to answer requests and provide GPS-encoded information. The applications use GPS devices, engines, routing and encoding for access to specific requester-designated data retrieval requests. The applications access fax machines, beepers, telephones and other communication linked devices. The system accesses computer and storage systems with various applications in order to provide this information from a plurality of providers. The system thereby eliminates or reduces the need for large storage devices and interchangeable storage modules.

35

One embodiment of the present invention includes a requesting device, a data provider (hardware and software), a user, tagger applications or GPS engine and router system with protocols for encoding, tagging, modifying, interrogating, arranging, limiting, displaying, sorting, mapping, segregating, sending, receiving and updating waypoint and the waypoints connected

1

data structures with digital or graphic maps, digital voice files, linked digital web files properly encoded and tagged by way of specific devices, or by traditional computer and storage systems.

5

The application programs contain protocols for users, providers, taggers, list maintenance organizations, and others, and will use a dynamic identification system from applications containing GPS search engines, route planners, compilers, designators, publishers, and others to permit communication of information.

10

The PCD is a cellular-phone-sized electronic device, combining the capabilities of a GPS receiver, transceiver, digital beeper, cell phone and projection system into one compact unit. The PCD is capable of uploading emergency information (medical, police alert, etc.) via a one-push button that phones 911 or a security monitoring center similar to those used for house alarms. The alert continues to be broadcast until a response is made.

15

The PCD is also capable of downloading information via a request to a data provider, similar to a request for directory information from a phone company or other service. In this mode the PCD acts similar to calling a phone operator for information. However, in this instance, no human contact is required. The caller requests specific information (location of gas stations, names of restaurants, local banks, etc.) via a voice command ("Download e.g., Wells Fargo Banks") or via digital commands using a keypad or other input device and the requested information is automatically downloaded to and stored in the memory of the user's PCD. This information can be accessed off-line via the screen on the PCD. It is all done digitally, eliminating having to write down information such as name, address, location map, GPS latitude and longitude encoding, direction and distance to location, hours of operation, or other items of information. The PCD can be plugged into an automobile input port or similar device, if available, and provide distances and directions to locations of interest. Similar information of a condensed nature can also be provided to the user via the screen of the PCD. The user is not required to be a subscriber to some proprietary system, instead the PCD can use any means to access any data base from any potential provider, whether GPS encoded or not.

25

30

In some areas the information would be sent and received by way of a Local Area Broadcast via radio frequency signals to each home, car or PCD within a reception area. In such an embodiment, users are able to access companies listed on the broadcast network from data providers of properly tagged, yellow page-type information or are provided with GPS encoded information and maps similar to web page listings. This would be advantageous to small towns with little information available for travelers, but which have an interest in providing up-to-date traffic, weather and travel advisories to benefit the local community and businesses. Such a system does not require a master, home or base unit. The providers of data base or advertising information could be a single data provider and could also be individual users with application programs that allow provision of such data. The application programs provide a means for

35

1 sending and receiving data, GPS encoded data and graphics encoded data. The application programs can also act as a universal coder/decoder to other proprietary GPS-data bases.

5 The present invention allows users to request detailed information relating to their present location as well as information related to distant locales. Some of the advantages provided by the invention include:

1. Information can be received digitally by a PCD user from any system.
2. Multiple requests can be retained, stored or resent.
- 10 3. In-depth dynamic data retrievals are possible and could be viewed later.
4. GPS tagging and encoding with latitude and longitude information along with encoded maps for navigation.
5. Small non-contiguous map segments are possible.
6. On-line storage of data personal and other information, along with GPS encoded maps on some data files.
- 15 7. Display menus, interfaces and applications can be viewed on heads-up display systems in automobiles, homes, businesses and various commercial applications.
8. Allows for portable Internet access.
9. Provides a means for an Internet based telephone directory access tagged and linked to the originating area code and phone numbers.
- 20

Remote and distant third parties could communicate with each other and, by sending and receiving GPS encoded data, can meet or find each other in remote locations. Maps and other digital data may be transmitted/received by fax, beeper (receive only), computer, phone and radio.

25 One embodiment of this invention would include a system of non-subscribers communicating to each other in a similar fashion, without the use of base stations. In addition, the non-subscribers could send personal data bases with maps included, GPS information, and other information of non-related data or graphics from publishers of any such data base. In this embodiment the device would act as a transceiver, sending and receiving dynamic moving waypoint information in digital formats, including maps of various sizes and embodiments.

30 The PCD can display a singular or a plurality of images and displays, project an image on to a screen or viewing surface, store or communicate data (depicted as a line, graphic, icon, etc.) to and/or receive latitude and longitude data from third parties. Additionally, the device can send/receive latitude- and longitude-encoded maps and other data to/from a third party, send/receive standard or non-standard phone and fax communications (AM, FM, spread spectrum, microwave, laser or light beam in free or fiber optic, line of sight, reflected, satellite, secure or non-secure, or any type of communications between two points that the application or state-of-the-art may allow), perform computer functions from existing application software and

35

1
operating systems, receive standard or non-standard beeper messages, interface with a
conventional computer and provide an interface to a heads-up display, an external viewing device
5 or any projection system.

An embodiment of this invention incorporates a GPS transceiver with a designated
application used with a communication system or network. Several users of this invention can
communicate and send data, maps and graphic files with or without GPS encoding. By example,
a user could request from another party a map of walking trails of Yosemite Valley with latitude
10 and longitude designations properly GPS encoded. This map may not be in the requesting user's
data base or in a large number of subscriber's or non-subscriber's data bases. This highly stylized
map and encoded information, of a possible non-uniform nature, could be on just one user's PCD
device or external source. The requesting user could contact the specialized source for specific
information, and be sent via a communication link, the specific data, this data could then be
15 modified by the user and sent back to the original provider.

The preferred embodiment of the PCD and system provides a means for requesting and
receiving data files which can be tagged, modified and interrogated. This data can be comprised
of many different formats and applications with potentially unique compilations from potentially
unrelated, (non)-subscribers or (non)-linked users. These users can communicate with
20 commercial, business and personal computer systems and devices having the capability of
running an application (or applications) and having the ability to request and provide waypoint
information which can be tagged, modified and interrogated.

Another preferred embodiment of this invention provides a means for decoding tagged,
modifiable and interrogatable maps and data files furnished by third parties for display on the
25 user's PCD or traditional computer devices.

In one embodiment of the device and tagging system the GPS information is
communicated from locations, homes, businesses, commercial designations, government
resources, public and private areas, cyberspace and other communication systems. Various
designated locations, or a plurality and multiplicity of locations, or data structures, are assigned
30 as waypoints. These waypoints could be tagged, or interrogated from an application program
which describes, encodes, reports, modifies and communicates this encoded information and data
from any location. In addition, the transmitting device may report a plurality and multiplicity of
locations or events unrelated to either the location of either the transmitting or receiving device.
Indeed, the device could communicate to many unlinked, unreported or unconnected waypoints
35 and send active dynamic information to the requester. Cyberspace providers may enter the
network web system, use applications for device communications and participate in the exchange
of information using designated GPS engines and applications. By way of example, the
invention can provide a requester with dynamic advertisements encoded with maps, location

1

information, or other data to a location anywhere in the U.S. Indeed, tagged files which are linked can be sent from a third-party publisher located in another state.

5

The system is similar to the world wide web, except the web does not use GPS engines, applications, tagging systems, etc. By way of example, one difference is that the invention uses GPS devices, engines, applications and encoding for access to specific requester designated data retrieval techniques. The invention provides a means to locate specific individuals or places using standard GPS search techniques.

10

The system includes the concept of storing data, including voice messages. The system encodes files for use in a location tagged data format system. Users can request and compile information and store the information on remote computer systems. Certain protocols for compilation, encoding and tagging data files may be desirable in order to create files for system usage.

15

An embodiment of the invention uses fax, beepers, telephones, and/or computer and storage systems with application programs to properly GPS encode, tag, modify and interrogate requests and provide same from a plurality of providers. An embodiment of the invention includes applications or GPS engine systems for encoding, tagging, modifying, interrogating, arranging, limiting, displaying, sorting, mapping, segregating, sending, receiving and updating waypoints and its connected data structures with maps, or by any other means by way of specific devices, or by traditional computer and storage systems.

20

Another advantage the invention provides is a means to display this type of information and a means to store data unrelated to any interrogation by the PCD device. Methods of display include multiple of displays including, by example, overhead displays, heads-up displays, projection systems, LCD displays, computer displays or any past or future designed displays whether connected directly or by some electromagnetic means. The preferred embodiment of the device could include any means of display or combinations thereof. In addition, the device could include many control devices such as remote control, remote mouse type devices and any combination of keyboards.

25

30

Further objects, features and advantages of the invention will become apparent from the following detailed description taken in conjunction with the accompanying drawings showing an illustrative embodiment of the invention in which like parts are designated by like reference numerals throughout.

35

DESCRIPTION OF THE DRAWINGS

FIG. 1 illustrates a GPS transceiver system and communication links incorporating the present invention;

1

FIG. 2 is a front perspective view of a PCD of the present invention showing a layout of controls and an initialization screen;

5

FIG. 3 is a rear view of the PCD of FIG. 2;

FIG. 4 is a block diagram of the PCD of FIG. 2;

FIG. 4A shows a screen menu hierarchy of the PCD of FIG. 2;

FIG. 5A illustrates a flow chart depicting the program sequence for the entry of a personal identification number (PIN) and personal data into the PCD of FIG. 2

10

FIG. 5B illustrates a flow chart depicting the program sequence for the user to select a mode of operation using the PCD of FIG. 2;

FIG. 5C illustrates a flow chart depicting the program sequence for the user to control the GPS mode of the PCD of FIG. 2;

15

FIG. 5D illustrates a flow chart depicting the program sequence for the user to control the phone mode of the PCD of FIG. 2;

FIG. 5E illustrates a flow chart depicting the program sequence for the user to control the computer mode of the PCD of FIG. 2;

FIG. 5F illustrates a flow chart depicting the program sequence for the user to control the radio mode of the PCD of FIG. 2;

20

FIG. 6 illustrates the Main Menu page of the PCD of FIG. 2;

FIG. 7 illustrates the select GPS Function page of the PCD of FIG. 2;

FIG. 8 illustrates the GPS: Location page of the PCD of FIG. 2;

FIG. 9 illustrates the GPS: Show Me page of the PCD of FIG. 2;

FIG. 10 illustrates the GPS: Get Map page of the PCD of FIG. 2;

25

FIG. 11 illustrates the GPS: Third Party page of the PCD of FIG. 2;

FIG. 12 illustrates the FAX page of the PCD of FIG. 2;

FIG. 13 illustrates the Beeper page of the PCD of FIG. 2;

FIG. 14 illustrates the Phone page of the PCD of FIG. 2;

FIG. 15 illustrates an Information Request page of the PCD of FIG. 2;

30

FIG. 16 illustrates the Computer page of the PCD of FIG. 2;

FIG. 17 illustrates the Radio page of the PCD of FIG. 2;

FIG. 18 illustrates the Receive Queue page of the PCD of FIG. 2;

FIG. 19 illustrates the Send Queue page of the PCD of FIG. 2;

FIG. 20 illustrates a typical listing downloaded from a data provider;

35

FIG. 21 illustrates a typical GPS encoded map downloaded from a data provider;

FIG. 22 illustrates a typical GPS encoded map with waypoints locating restaurants within a specified radius;

FIG. 23A illustrates an exemplary data provider;

FIG. 23B illustrates an exemplary configuration of a non-PCD computer utilizing a modified application module;

FIG. 24 illustrates a software module configuration of a requester;

FIG. 25 illustrates a software module configuration of a provider;

FIG. 26 illustrates a software module configuration of the application module;

FIG. 27 illustrates a software module configuration of the tagging system;

FIG. 28 illustrates a software module configuration of the GPS engine;

FIG. 29 illustrates a software module configuration of the universal translator;

FIG. 30 illustrates a typical configuration of the service provider;

FIG. 31 illustrates a possible configuration of the digital web TV;

FIG. 32 illustrates the Weather Map Request page of the PCD of FIG. 2; and

FIG. 33 illustrates a weather reporting device.

DETAILED DESCRIPTION OF THE INVENTION

FIG. 1 shows a system capable of communicating using the electromagnetic energy spectrum, traditional computer networks, cellular phone networks, public telephone networks, and satellite system networks. The major components of the system comprises personal communication devices (PCDs) 20 and one or more of the following: a cellular phone network 60, a standard phone line network 70, an electromagnetic energy spectrum network 80 and/or a computer network 90. The PCD receives signals from a GPS satellite system 10.

FIG. 2 illustrates a PCD of the present invention. The PCD has a display 28a. The display may be of a LCD type or other types known in the art. Incorporated with the display is a touch screen input device 28b, which are known in the art. The PCD also has a alphanumeric key pad 26, which includes many of the standard keys generally found on computer keyboards. The location of the keys, and the selection of the characters used on a single key, may be varied as desired. The PCD also has specialized keys 27a-g, n related to GPS, telecommunications, and other functions. Located on one side of the PCD are a number of input and output ports. In the embodiment shown, these ports include a modem output port 29g, a generalized communication port 29f, a power port 35b, an infrared port 29e, and a heads-up display interface port 25k. The location of these ports are shown for descriptive purposes only, the specific location of these ports on the PCD is not critical. The power port allows the PCD to be operated from an external power source (not shown). The communication port allows the PCD to be connected to printers, local computer networks, and the like.

FIG. 3 shows a rear view of the PCD of FIG. 2. The rear of the PCD contains a microphone 34 towards one edge of the rear of the PCD and a speaker 33 towards the opposing edge. The layout of the microphone and the speaker is similar to that found in portable cellular

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

telephones. An antenna 32 extends from the edge near the speaker to allow for communication in a cellular telephone network or via other electromagnetic spectrum means. The PCD contains a battery 38a. The battery allows for mobile operation of the PCD and is the selected power source if an external power source is not available through the power port. The PCD's operation is governed by a processor 21. A variety of microprocessors may be used, with the selection of such determined by processing power, power utilization, and other factors and requirements. The PCD has a slot 23 for a PCMCIA card, CD-ROM, or other computer accessory. The PCD is powered on when the power button 31 (shown in FIG. 2) is depressed. In the embodiment shown, at initial device power on, the processor causes the PCD to display the initialization screen 100 (shown in FIG. 2).

FIG. 4 shows a block diagram of the PCD. Control and logic functions are performed by the processor 21. Internal data storage 22, which is provided by conventional memory such as RAM or ROM or variations thereof, may be accessed by the processor. The processor may also access removable data storage devices 23 such as a hard disk installed via the PCMCIA slot, a CD-ROM type device or other similar removable data storage devices. The processor is connected by a data bus 24 to a number of devices. These include the alphanumeric key pad and other special purpose keys, the touch screen, and other hard wired input devices. The heads-up display output port and the display screen are also connected via the data bus to the processor, it being recognized that a number of display related devices such as VGA cards, chips, and the like are also required to implement the display device functions and the other previously mentioned functions. The microprocessor may also access or control communications with telephone networks, either hardwired or cellular, radio transmissions, infra-red transmissions, or communications with other computer devices.

All known verbal commands from GPS systems can be implemented and attachment or inclusion of voice activation for map instructions relative to location, GPS and street designations, including heading descriptions, distance, and arrival time estimates can be included.

FIG. 24 illustrates a block diagram of the PCD's software components. An application module or program 51 interfaces with the PCD's operating system 241. The operating system may be DOS, UNIX, Windows 95, Windows NT, O/S2 Apple McIntosh, Next Computer, or other operating systems, including operating systems well suited to devices with constrained memory or other limitations due to the small physical size of the PCD. The operating system additionally interfaces with other application programs 242 that provide standard file edit and other functions typically found in personal computers. The operating system, or other application programs interfacing with the operating system, provide for maintenance of data bases 245 used by the PCD. The application module includes a GPS engine 53 providing GPS functions, including interfacing with the GPS receiver 243 (shown in FIG. 4). A query menu program 54

1 of the application module controls the graphical user interface and related functions for the device. Included in the application module is a universal converter 55.

5 As illustrated in FIG. 29, the universal converter enables the PCD to read in data provided by third parties 291a, b and convert or filter such data to a format useable by the PCD. The universal converter first inspects the received data to determine if the data is in a known format which can be converted to the format used by the PCD. If the format is not known by the device, the universal converter attempts to extract any ASCII data or format the data as a bit map as appropriate.

10 As illustrated in FIG. 26, the application module further includes programs to implement data formatting and communication protocols using header protocols 271, layer protocols 272, and data provider protocols 273. The application module also includes a tagging system interface program 274. The elements of the tagging system are illustrated in FIG. 27. The purpose of the tagging system is to provide a common universal data structure for requests and responding to requests. Various techniques common in the GEO coding industry, using U.S. Census bureau data and tiger files with certain modifications, can establish parameters for software suppliers to use latitude and longitude encoding as coordinate pairs, postal code encoding and street centering encoding, all for the benefit of accuracy in designating certain files as "tagged". The tagging system provides the ability to apply and strip header and layer information to and from data files.

20 FIG. 4A shows the top level page menu display hierarchy of the PCD. At initial power on the initialization page 25a (shown in FIG. 2) is displayed. The initialization page allows for the entry of a personal identification number and other data. Depressing the home button 27E (shown in FIG. 2) displays the Main Menu page 25b. A number of additional pages are available from the Main Menu page. These include the GPS 25c, Fax 25d, Beeper 25e, Phone 25f, Computer 25g, Radio 25h, Send Queue 25i, and Receive Queue 25j pages.

25 FIG. 5A lists a sequence for the operator of the PCD to answer certain questions, provide information for future access regarding handling of emergency events and handling of same by civil authorities or private individuals empowered to act on behalf of the operator. Access is denied or provided based upon user codes. The entry of a user code may allow for limited to full access of the data stored in the device and usage of same with different codes providing different levels of access and usage. Similar information and sequencing is provided by the application modules and operating system for medical and other information in the event of emergencies. In one embodiment of the preferences screen (not shown) information can be displayed in a specified manner, events recorded and equipment options listed. Specific usage of the device and furnished software would be recalled by each user having access and user codes to operate the PCD, each user having unique individual screens and setups based on that user's preferences.

1
The initial setup of screen preferences and other user configuration details are well known in the art.

5 Selecting PIN 111 from the Main Menu page displays a screen 113 prompting the user to input a personal identification number. Using an alphanumeric key pad 26, the user inputs a personal identification number and presses ENTER 27g. The processor analyzes the entered personal identification number and determines if the number is valid 115 FIG. If the entered personal identification number is valid the processor enables PERSONAL 121, MEDICAL 131,
10 PREFERENCES 141 touch points on the display screen. These touchpoints, and touchpoints later referred to, are selectable either by pressing the display screen at the touchpoint location or by selecting the underlying display item with the cursor. If the PCD already contains personal, medical and preference data, the HOME button 27e is enabled. If the personal identification number is not valid, the processor 21 will increase the device security level 119. This may
15 include, but is not limited to, disabling the PCD operation for a specified time. Selecting PERSONAL 121, MEDICAL 131 or PREFERENCES 141 touchpoints displays the corresponding pages 123, 133, or 143. These pages request specific data, and allow the user to input data using alphanumeric key pad 26. Completion of data entry is indicated by pressing the ENTER button 27g.

20 In addition, the Initialization page 100 FIG. 2, as well as all other pages, displays the time and the date 103, touch points for QUE IN 550 and OUT 600 (described later in this document) and limited GPS information 107. The limited GPS information comprises of the user's location (latitude and longitude), an arrow pointing to north and an arrow indicating direction of device travel.

25 When enabled, pressing the HOME button 27e (FIG. 2) signals the processor to display the Main Menu page 150 FIG. 5B. As shown in FIG. 6, the Main Menu page allows the operator to use the touch screen to select the GPS 200, FAX 300, BEEPER 350, PHONE 400, COMPUTER 450, RADIO 500, RECEIVE QUE 550 and SEND QUE 600 touchpoints. The heading and directional information are displayed in real time and are dynamic. Pressing the
30 FAX touchpoint causes the processor to display a Fax page (shown in FIG. 12) which lists received facsimile messages 301. The Fax page includes display interfaces appropriate for the sending and receiving of facsimile communications through the FAX Phone Modem port 29g, and such displays and functions are well known in the art. Pressing the BEEPER touchpoint causes the processor to display a Beeper page (shown in FIG. 13). The Beeper page displays
35 received beeper messages 351 and allows for the deletion of such messages from the display and internal memory storage. Also, a sub-menu portion of the display 151 is reserved for sub-menus and directories.

1 Pressing GPS 200 causes the processor 21 to display a GPS Function page 201, which is illustrated in FIG. 7. The GPS page provides for selection of a GPS mode through touch points
5 in the sub-menu portion of the display. The available modes are location 210, show me 230, get map 250 and third party 270 modes. The display returns to the GPS Function page when the PREVIOUS button 27i (shown in FIG. 2) is pressed. The display hierarchy for the GPS functions is illustrated in FIG 5C. The Location, Show Me, Get Map, and Third Party pages descend from the GPS Menu page. The Location page comprises the current map, the location on the map of
10 the device, and a plot of the trail of the device on the map. The sub-menu portion of the display provides for additional selection of still further pages. These pages include a Menu page, a Mode page, a Waypoint page, and a Preferences page.

The Location page is illustrated in FIG. 8. The Location page includes a GPS map 219 (latitude and longitude encoded coordinate pairs). The sample page shown is an encoded map
15 showing the device position, plot trail and the encoded map location of the selected waypoint. The map displayed could be from on-board memory or sent by other third parties by way of communication links to the PCD. When map data files are encoded with location information, the location information can be referred to as waypoints. These tagged waypoints, with links to other data structures, can then be sent to users via an application to various communication
20 systems. Closed-loop or proprietary GPS receivers can send/receive data to/from other third parties (Brand X, Brand Y) via their own proprietary format using an application system as a universal converter. The location information is dynamic and updated periodically by the PCD's communication system via link-up with GPS-based satellites. The Location page indicates the PCD position 801, indicated by a walking person, as being located on a highway 810. A
25 waypoint 802 is along the highway en route to the desired destination address 803 located on a local street 804 which intersects the highway. A first point of interest 807 is also displayed as being along the highway, as is a second point of interest 805 along a second local road intersecting the highway. The limited GPS information, providing location, heading and north, is also displayed. The illustrated Location page display shows only one possible combination of
30 a map layout. Other display sequences such as North up, course up, user at top of screen, user in middle, and other display sequences are possible. The dynamic nature of the PCD allows the PCD to display GPS encoded maps as the PCD progresses dynamically with relation to the maps.

Using interpolation techniques, performing spatial query analysis, and establishing layers
35 for best display scale for any given map record allows the device to provide the user extended capability not possessed by traditional GPS devices. Applying various protocols and interpolation techniques allow files to be arranged geographically by distance from a designated point (usually the requesters latitude and longitude as the starting point, but other locations may

also be used). The maps are also arranged in layers, menus, limited, listed, showed, displayed, and sorted.

The Location mode provides typical GPS system functions. The touch points MENU 213, MODE 215 and WAYPOINT 217 and PREFERENCES 221 provide access to the Menu, Mode, Waypoint, and Preferences pages. These pages, along with various buttons on the alphanumeric key pad 26 FIGS. 2 and 4 and special function buttons 27, are used to configure the display to the user's preference. The preferences page 221 enables selection of such features as voice, maps, scroll, off screen maps away from cursor and other features. The listing name 219 portion of the Location page displays information pertaining to a waypoint selected through the use of the cursor.

FIG. 9 illustrates the Show Me page accessed from the GPS page. The Show Me page shows a list of available maps 901a-i stored on-board, which includes maps retrieved from the receive queue area of the PCD memory. The user can load a map into the location or third party pages by pressing the corresponding number key on alphanumeric key pad 26 (shown in FIG 2) or by scrolling through the list to highlight the appropriate map and then pressing ENTER button 27g. Maps may also be removed from on-board storage using the DELETE button 27h.

FIG. 10 illustrates the Get Map page accessed from the GPS Menu page. The user of the PCD can request the map by location from PCD memory or an external source. The user may enter a desired map location. If a map location is entered, the PCD will only search PCD memory for a map for the entered location. Maps from an external source are downloaded via any of the communication links such as the FAX, BEEPER, PHONE or RADIO touchpoints provided in the sub-menu portion of the display 151. Depending on the user's requirements, several maps could exist showing similar map areas with different layers for viewing. By way of example, airport maps with air space requirements, coastal waterway, maps, and interstate maps, and even hand drawn maps scanned into a computer system all show different resources within a given geographic area. These maps, when presented on the PCD, could over-saturate the display map detail for any given map area. Therefore, it is preferred that the actual map displayed be selectable. Maps are retrieved by pressing QUE IN 550, scrolling to highlight the desired map, and pressing ENTER 27g FIG. 2.

FIG. 11 illustrates the Third Party page accessed from the GPS menu page. The Third Party page provides an interface to communications with a third party through touch points in the sub-menu display 151. In the display shown, a user can receive a third party's data and GPS encoded map for viewing on the device or save it for future usage. The user can also dynamically track the third party by periodically having the third party send updates via normal communication links. The third party location can be displayed on maps dynamically sent by map publishers, maps already on-board (furnished at some earlier date), or on maps sent by the

1

third party. The PCD plots and interpolates the GPS data sent by the third party and places an icon 951 (GPS latitude and longitude coordinate pair) on the displayed map using spatial query analysis techniques performed by an application module. The information received from the third party may be other than maps or GPS encoded information, but may be information of any type. The data is received from the third party using phone 400 and radio communication links 500. A PREFERENCES touch point 274 enables entry of items such as phone numbers for automatic call back and time interval for automatic transmission of information. If the radio, a satellite phone, or other frequency based communications link is utilized, the PREFERENCES touch point allows entry of frequencies for use for automatic transmission of information. A split screen displays the user's location on a map on the left side of display 272 and, after contact with a third party via a communication link, the third party's map and location on the right side of display 273. If the third party's location is sufficiently close to the user's location, or if the user's displayed map covers a sufficiently large area, both the user's and third party's location can be shown on the same map without resort to a split screen display.

FIG. 32 illustrates a Weather Map Request page. The Weather Map Request page is accessed by pressing the Weather button 27n (shown in FIG. 2) on the PCD. The Weather Map Request page allows the PCD user to specify the map location and scale, the map type, whether the selected map should be automatically updated at specified intervals, and whether a set of maps should be displayed in a sequential fashion. The PCD displays a number of different types of weather maps, including satellite images, radar maps, temperature maps, wind chill maps, and any other type of weather map available. Some weather information is more perfectly provided by showing a sequence of displays indicating the change in weather over time. Therefore, the PCD allows the operator to sequentially display a set of maps, thus providing an animated map display.

FIG. 33 illustrates a weather reporting device. The weather reporting device has a power port 334 to provide electrical power to the weather reporting device. As with the PCD, the weather reporting device may also be powered by a battery (not shown). The weather reporting device also has a computer port 335, an interface port 333, an antenna port 332, a pressure access port 331a, and a number of auxiliary ports 331b-e. The computer port provides a communications interface to a standard personal computer or the PCD. The interface port provides an interface to systems with weather detection features, such as aircraft with weather radars or lightning strike finders. The antenna port allows an external antenna to be connected to the weather reporting device, thereby providing remote operation capability. The pressure access port provides external access for an internal pressure sensitive device (not shown) for the determination of barometric pressure. A plurality of auxiliary input ports 441b-e provide an

1 interface for connecting the weather reporting device to external weather detection sensors such as temperature sensors, wind sensors, and other weather sensing devices.

5 The Fax page is accessed by pressing the FAX touchpoint on the Main Menu page. FIG. 12 illustrates the Fax page. The sub-menu portion of the display is available for listing previously stored phone numbers. These phone numbers are selectable as a facsimile destination. In addition, the user can directly enter the phone number to indicate the facsimile destination. As with other pages, the PCD continues to dynamically display the limited GPS information of
10 location, north and heading. The PCD facsimile function is performed by application software executed by the processor. Multiple fax locations, time set, send after certain time, and other traditional functions of fax machines and their implementation are well known in the art. The Fax page provides for display of a message (not shown) entered via the alphanumeric key pad 26 (shown in FIG. 2) or through selection of messages stored in the send queue area of device
15 memory. Messages stored in the queue area of PCD memory can be selected by scrolling through a directory 305 of all fax messages stored. To view a stored message the user uses the SCROLL button 27a (shown in FIG. 2) to highlight an entry, and then press ENTER button 27g. Pressing the SEND button 27b transmits the selected or entered facsimile. The user may also view received faxes using this mode by pressing QUE IN 550 Fig 12, using the SCROLL button 27a
20 to highlight the desired message, and pressing the ENTER button 27g.

The Beeper page is accessed from the Main Menu page. Pressing the BEEPER touch point on the Main Menu page causes the processor to display the Beeper page. The device contains capabilities consistent with common practices of beepers, also known as pagers, such as sending and receiving messages. These functions and their implementation are well known
25 in the art. The PCD is also satellite communications capable. Beeper messages can be received by the PCD without interference to the other device capabilities. Therefore, the user could continue using the telephone or other features seemingly uninterrupted by the reception of digital beeper messages and display of those messages. The Beeper page provides a list of beeper messages (not shown) stored in the receive queue area. Messages stored in the receive queue can
30 be selected by scrolling through listing 353 FIG. 13 of all beeper messages stored. To view a stored message, the user uses the SCROLL button to highlight a desired message and presses the ENTER button 27g. Messages are deleted when the DELETE button is pressed with at least one message selected.

The Phone page is illustrated in FIG. 14. The Phone page is accessed from the Main
35 Menu page. Pressing the PHONE touchpoint on the Main Menu page causes the processor to display the Phone page. The Phone page is also accessed by pressing the PHONE touchpoint on the Get Map and Third Party pages. As with the other pages, the limited GPS data is continuously displayed showing PCD location, heading, and north. The PCD can access several

1

areas of the display even while the PCD is being used as a telephone. Information provided in the display area 1401 will vary depending upon the page from which the phone page was accessed. The Phone page provides for selection of a function through touch points displayed in the sub-menu portion of the display. The selectable touchpoints are: POLICE 403, MEDICAL 405, DATA PROVIDER 407, DIRECTORY 413, and MEMORY 415.

When the POLICE touchpoint is pressed, the PCD places a call to emergency 911. The 911 telephone number is the default, another number could instead have been entered for any particular user through the preferences selection. Once the telephone call is answered, the PCD provides the information entered using the Preferences function and the device location. The user may also establish voice and data communications through the microphone 34 and speaker 33 (shown in FIG. 3).

The PCD performs equivalent functions when the MEDICAL touchpoint is pressed. As different phone numbers and information can be entered in the selection of user preferences, however, different phone numbers may be used and different information may be transmitted.

When the DATA PROVIDER touchpoint is pressed, the processor displays the Data Provider Connect page. The Data Provider Connect page provides a means to specify the type and amount of data to be downloaded from a specified data provider. The Data Provider Connect page has numerous data fields which are selected by use of the cursor. Once a field is selected, the user may enter data in that field using the alphanumeric keys. The data fields include data for name, city, state, map area, zip code, telephone area code, retail category, distance from device location, and maximum number of listings to be provided by the data supplier. Whether a map only is requested and what particular types of maps, such as interstate maps, walking area maps, zip code maps, street maps, area code maps, or state maps, are requested are also provided as options. Touch points for weather information and traffic reports are also provided. Once the appropriate data fields and/or type of data required is input or selected, pressing the send key transmits the data request to the data provider. Details regarding the method of transmission of the responsive data is automatically sent by the data provider to the data provider along with the data request.

The primary data providers may include the public telephone company networks but may also include other entities. The data providers maintain data, including maps, telephone yellow page entries, and other information such as traffic and weather reports. This information is maintained in a timely manner and is accessible through the use of data base methods well known in those in the art. Upon receiving a request for data, the data provider determines the nature of the data request, searches the appropriate data base or data bases, and transmits the requested information to the requesting device in the manner specified by the requesting device. The user, after the PCD receives the data as requested, disconnects, goes off line to review the information,

1

deleting some, saving others, and storing other encoded information on the PCD. The user can now further edit the device's entire data base and decide a sequence for navigating to the locations listed in the various menus as waypoints. Thus users of the PCD can decide to navigate using the GPS features of the PCD and select certain waypoints and the order in which to proceed. By way of example, but not limited to same, users could select gas stations, banks, restaurants, shopping centers in unfamiliar areas, navigate today from one point of beginning and tomorrow continue navigating from another point of beginning, being assured that the device will always know how to get to various locations. Should the user require further locations to visit, the PCD is capable of obtaining new navigational data and adding to the already active route plan without having to completely start over.

Pressing the DIRECTORY touchpoint 413 displays an alphabetical listing (not shown) of phone numbers stored on-board. The user may scroll through the listing and select a desired phone number. Pressing MEMORY 415, displays an alphabetical listing (not shown) of frequently used phone numbers. The user may scroll through the listing and select a desired number. Pressing the SEND button causes the device to dial the selected phone number.

FIG. 16 illustrates the Computer page. The Computer page is accessed by pressing the COMPUTER touchpoint 450 (shown in FIG. 6) on the Main Menu page. The Computer page allows the user to operate the device as a standard personal computer utilizing application programs of the type normally present on personal computers. As examples, the display of FIG. 16 provides for touchpoints in the sub-menu portion of the display for calendar date entry, notes, and organizer application programs. As with the other pages, the limited GPS information is also displayed.

FIG. 17 illustrates the Radio page. The Radio page is accessed by pressing the RADIO touchpoint 500 on the Main Menu page. The radio mode provides the user with an interface for selecting the type of radio signal through touch points displayed in the sub-menu 151 area. The selectable types are: AM 503, FM 507 and TRANSCEIVER 511. Selecting any type will display a page (not shown) requesting frequency, volume, and other parameters relating to radio transmission and reception. The AM and FM are standard receivers. The device can thereby tune and listen to broadcasts that provide data links and receive data files using legal AM or FM radio bands (or any other radio band legal to access and provide radio station information). The device therefore allows users to communicate information amongst themselves without having to rely on telephone technology. This is especially valuable when telephone technology is not available.

The Receive Queue page displays stored received messages. The received messages may be displayed by reception type through selection of the transmission line type listed in the sub-menu portion of the display, the selectable types, through touch points displayed in the

1

sub-menu 151 area, are: ALL 553, FAX 555, BEEPER 557, PHONE 559, COMPUTER 561 and RADIO 563. Selecting a type, will sort (by specified type) and display (by-date and time) all messages received. By way of example, the radio queue contains GPS-encoded voice mail or digital files (containing information to various sites) provided by private third-party sources. The phone system queue contains previous calls with digital messages linked to web pages containing voice and video data. The computer which may be queued contains personal letters, calendars, notes and the like from more traditional sources or user created tagged files for storage. The fax queue contains traditional faxes which may illustrate maps with waypoints. The beeper mode queue contains received beeper messages (digital and voice).

The Send Queue page is accessed by pressing the SEND QUE touchpoint on the Main Menu page. The Send Queue page includes similar functions as the receive queue, except the Send Queue is a staging area for sending messages. The Send Queue page displays sent or to-be-sent data and an interface for selecting the specific type of queue. The selectable types, through touch points displayed in the sub-menu portion of the display 151, are: ALL 603, FAX 605, BEEPER 607, PHONE 609, COMPUTER 611 and RADIO 613. Selecting a type, will sort (by specified type) and display (by date and time) all messages sent or waiting to be sent.

FIGS. 23 A and B are a system block diagram including a block diagram of a data provider. A plurality of PCDs 231, 232, 233 communicate with each other using the aforementioned communication means. The PCDs also communicate with various data base information suppliers including private data base information suppliers, publisher data base information suppliers, telephone service data base information suppliers, and a data base provider. The data base provider receives digital requests for map information or other data regarding a geographic area. The data provider collects map data and other data and tags the other data to the map data and maintains the map and location tagged data in a data base. Human intervention is not required in responding to data requests.

As shown in FIG. 23B, the application module of the device is ported to a computer system not GPS capable, or merely not portable so as to have no need for a GPS receiver. The application module allows non-PCD based computer users to provide data to the data provider in the correct format, as well as receive data from devices or the data provider. This allows the non-device base computer user to track the location of devices and to collect information to be manually entered into a traditional GPS capable device as an aid in future trip planning.

FIG. 20 illustrates a list of GPS encoded data for a restaurant listing of restaurants in a requested area. This list may have been furnished by third parties or a data provider. The PCD has stored this information in digital format and is displayed on a GEO coded map, GIFF map or any other map the PCD stored in memory or receives from a third party or data provider. The information can be arranged by the PCD using criteria enabling the user unlimited access to the

1

data. If the user chooses to navigate to these locations singularly or as a group, the GPS engine performs these functions, allowing a user of the device to accurately travel to the desired restaurant. As shown in FIG. 21, the PCD can use any scale of map or combinations and other types of maps as shown. The user of the PCD selects certain maps for storage and recalls same when needed for navigation. By way of example, the user's device could have a local Los Angeles street map, an interstate map (as shown in FIG. 21), and a New York city map in device memory. The user could navigate to the airport using the GPS functions and stored Los Angeles map, fly to New Jersey, rent a car and navigate to New York using the interstate map and, finally, find a specific restaurant in New York City by using the third map stored in PCD memory.

10

As shown in FIG. 22, the PCD contains a map with various waypoint locations the user has selected. These waypoints are both standard waypoints 221 and linked waypoints 222. The waypoints are indicated by a marker on the display. Standard waypoints indicate identifiable locations of interest. Linked waypoints have additional data associated with the waypoint. The additional data may be text data, visual data such as a photographic image of the waypoint, or an audio data file. When the marker for the linked waypoint is selected using the touch screen or other input device, the processor determines if the additional data associated with the waypoint is available in the PCD memory. If the additional data is not available in the PCD memory, the PCD automatically requests the additional data from a data provider. Once the additional data is available, the PCD displays or otherwise makes use of the additional data.

15

20

Using the map of FIG. 22, the user could navigate to a school, restaurant, bank, gas station, government office using the PCD to interpolate using spatial query techniques to find the best routes to each location. The PCD can re-collate the list for the most efficient route using the application and GPS engine modules. Using software programming techniques and math formulas, persons skilled in the arts will utilize spatial analysis queries and functions to determine best routing and "closest to" scenarios. In addition, centroid interpolation functions and match-rate comparison functions used by the GEO coding community will further enhance this application's ability to universally communicate with other systems.

25

30

FIG. 30 further illustrates a system whereby the user uses a PCD to dial a direct access number similar to dialing 411, but all requests are requested and serviced automatically. Upon connection to the system, the user makes keyboard requests to the PCD or traditional computer system using the application program of the PCD. Upon requests being received by the data provider or similar information provider, the provider or supplier searches the data base for data responsive to the request. The provider or supplier can access further data through data links to other third party sources and continue to provide all data required by the requester. This system is consistent with the world wide web, linking data through hypertext connections and designations. This invention's system converts information requests to data requests, not verbal

35

1 requests, as presently being practiced in directory assistance type services. This narrow usage
of the application module allows convenient access to directory assistance that primarily provides
5 data and chunks of information in a short period of time consistent with directory assistance
today.

FIG. 31 shows a web page screen with a data provider icon displayed on the device.
Pressing or otherwise selecting the icon will enable a menu for the requester to specify a data
request. Download will be in the form of a compressed digital data file that may include video,
10 sound, or other digitally encoded data.

While this invention has been described with reference to illustrative embodiments, this
description is not intended to be construed in any limiting sense. Various other embodiments of
the invention will be apparent to persons skilled in the art upon reference to this description. It
is therefore contemplated that the appended claims will cover any such modifications of the
15 embodiments as fall within the true scope and spirit of the invention.

1

CLAIMS

5

1. A locating and map downloading system comprising:
a personal digital communicator comprising:

10

a display;

a receiver for receiving GPS signals;

a first transceiver;

a first modem coupled to the transceiver and to a first digital processor;

communicator input means for formatting a request for map information;

15

the first digital processor providing a means for processing the GPS signals and determining therefrom the location of the communicator, for transmitting via the first modem and the first transceiver the request for map information, for displaying on the display map information responsive to the request, and for displaying on the display the communicator location with reference to the map information; and

20

a map storage and transmitting device comprising a second transceiver, a second modem coupled to the second transceiver and a second digital processor, memory for storing map information in digital form, the second digital processor providing a means for determining which map information stored in the memory is responsive to the request and transmitting via the second modem and the second transceiver the map information responsive to the request.

25

2. The locating and map downloading system of claim 1 wherein the first processor transmits via the first modem and the first transceiver a request for map information pertaining to the communicator location and receives via the first transceiver and the first modem map information responsive to the request.

30

3. The locating and map downloading system of claim 1 wherein the first processor transmits via the first modem and the first transceiver a request for map information pertaining to a location other than the communicator location.

35

4. The locating and map downloading system of claim 1 wherein the map storage and transmittal device memory stores additionally stored data associated with discrete data points within the map information and such additionally stored data is transmitted with the responsive map information.

5. The locating and map downloading system of claim 4 wherein the communicator receives via the first transceiver and the first modem the additionally stored data.

1

6. The locating and map downloading system of claim 5 wherein the communicator further comprises communicator memory for storing map information and additionally stored data in digital form and the first processor stores in communicator memory the device location.

5

7. The locating and map downloading system of claim 6 wherein the map storage and transmitting device comprises a second personal digital communicator.

10

8. The locating and map downloading system of claim 7 wherein the first processor transmits via the first modem and the first transceiver a request for the location of the second communicator.

15

9. The locating and map downloading system of claim 4 wherein the first processor requests map information and additionally stored data using selection criteria.

20

10. The locating and map downloading system of claim 4 wherein the first processor transmits further data associated with a location to the map storage and transmittal device and the second processor stores the further data associated with the location in the map storage and transmittal device memory.

25

11. The locating and map downloading system of claim 8 wherein the second communicator transmits the location of the second communicator in response to the request for the location of the second communicator.

12. The locating and map downloading system of claim 1 wherein the first processor determines a heading of direction of the communicator.

30

13. The locating and map downloading system of claim 9 wherein the map storage and transmittal device memory stores additionally stored data associated with discrete data points within the map information and a marker indicating the availability of such additionally stored data is transmitted with the responsive map information.

35

14. The locating and map downloading system of claim 9 wherein the first processor displays on the displayed map information a marker at a position on the display corresponding to a discrete data point, the marker indicating that additionally stored data is available for the discrete data point.

1

5

15. The locating and map downloading system of claim 14 wherein the first processor displays on the displayed map information different markers based on aspects of the additionally stored data.

16. The locating and map downloading system of claim 14 wherein the communicator input means provides for selection of the marker.

10

17. The locating and map downloading system of claim 16 wherein the first processor determines a route to a selected marker.

15

18. The locating and map downloading system of claim 17 wherein the first processor determines a route to a number of sequentially selected markers.

19. The locating and map downloading system of claim 18 wherein the first processor modifies the route to a number of sequentially selected markers in response to the selection of a further marker.

20

20. The locating and map downloading system of claim 16 wherein the first processor displays on the display additionally stored data associated with a discrete data point when the marker associated with the discrete data point is selected.

25

21. The locating and map downloading system of claim 16 wherein the first processor transmits via the modem and the transceiver a request for additionally stored data when the marker associated with the discrete data point is selected.

30

22. The locating and map downloading system of claim 21 wherein the additionally stored data comprises a video data file.

23. The locating and map downloading system of claim 21 wherein the additionally stored data comprises an audio data file.

35

24. The locating and map downloading system of claim 6 further comprising a weather information gathering device providing weather information to the first processor.

25. The locating and map downloading system of claim 24 wherein the first processor automatically transmits via the first modem and first transceiver the weather information.

1

26. The locating and map downloading system of claim 1 wherein the first processor determines the direction of North.

5

27. The locating and map downloading system of claim 9 wherein the first processor determines if the communicator memory contains map information for a geographic area within a selected radius of the communicator and transmits via the modem and the transceiver a request for map information for a geographic area within a selected radius of the communicator if the communicator memory does not contain such map information.

10

28. The locating and map downloading system of claim 1 wherein the first and second transceivers are transceivers for communicating in a cellular phone network.

15

29. The locating and map downloading system of claim 1 wherein the first and second transceivers are transceivers for radio communications.

30. The locating and map downloading system of claim 1 wherein the first and second transceivers are transceivers for telephonic communications.

20

31. The locating and map downloading system of claim 1 wherein the first and second transceivers are transceivers for communicating in a satellite communications network.

32. The locating and map downloading system of claim 1 wherein the first processor stores communicator configuration information in the communicator memory and configures the communicator according to the configuration information.

25

33. The locating and map downloading system of claim 32 wherein the communicator configuration information includes at least one personal identification number and the processor configures the communicator differently in response to different personal identification numbers.

30

34. A personal digital communicator device comprising:

a GPS receiver for receiving GPS signals;

a processor to determine the device location based on the GPS signals;

35

communication means to provide the device location to other personal digital communicator devices, to receive the device locations of the other personal digital communicators, and to request and receive map information from digital map storage devices; and

1

a display to display external map information received from digital map storage devices, and the device location and the other device locations on the external map information display.

5

35. The personal digital communicator device of claim 34 wherein the processor formats requests for specified data regarding unspecified locations within a geographic area from a data provider and processes responsive data to the requests received by the communications means, the responsive data including geographic location data.

10

36. The personal digital communicator device of claim 35 wherein the display displays a symbol indicative of the geographic location of the responsive data on the external map information display.

15

37. The personal digital communicator device of claim 36 further comprising computer memory accessible by the processor.

20

38. The personal digital communicator device of claim 37 wherein the computer memory stores internal map information in the computer memory.

39. The personal digital communicator device of claim 38 wherein the display displays the internal map information in the computer memory and a symbol indicative of the geographical location of the responsive data on the internal map information display.

25

40. The personal digital communicator device of claim 39 further comprising a keyboard input means for providing data to the processor.

30

41. The personal digital communicator device of claim 40 wherein the indicative symbol is selectable using the keyboard input means and the display displays the responsive data when the indicative symbol is selected.

35

42. The personal digital communicator device of claim 40 wherein the indicative symbol is selectable using the keyboard input means and the processor formats a request for data regarding the geographical location indicated by the indicative symbol when the indicative symbol is requested.

43. The personal digital communicator device of claim 34 wherein the processor determines a heading of direction of the device.

1

44. The personal digital communicator device of claim 34 wherein the processor determines the direction of north.

5

45. The personal digital communicator device of claim 34 further comprising a weather information gathering device providing weather information to the processor.

10

46. The personal digital communicator device of claim 40 wherein an entered personal identification number is entered using the keyboard means, at least one stored personal identification number is stored in the computer memory, the processor compares the entered personal identification number and the at least one stored personal identification number and disables device operation for a period of time if the compared personal identification numbers are not identical.

15

47. The personal digital communicator device of claim 46 wherein a plurality of personal identification numbers are stored in the computer memory and the displayed map information is displayed in different predefined formats when different personal identification numbers are entered.

20

48. A location tagged information storage and transceiver system comprising:
a transceiver means for receiving and transmitting digital data from and to an external computer;

25

a computer processor;
computer memory for storing map data for geographic areas and non-map data, with the non-map data in linked data fields concerning specific locations within the geographic areas for which map data is available tagged to the map data;

30

a sorting application module executed by the processor responsive to requests for specified non-map data concerning specified geographic areas, the sorting application module searching the computer memory by data fields for the specified non-map data and providing the specified non-map data and non-map data linked to the specified non-map data to the transceiver means; and

35

the transceiver means transmits the specified non-map data and the data linked to the specified non-map data.

49. The location tagged information storage and transceiver system of claim 48 wherein the sorting application module searches the computer memory for map data for the specified geographic area and provides map data for the specified geographic area to the

1

transceiver means and the transceiver means transmits the map data for the specified geographic area.

5

50. The location tagged information storage and transceiver system of claim 48 further comprising a linking and tagging module executed by the processor for linking data pertaining to a specific geographic location in linked data fields and tagging the linked data fields with a marker indicative of geographic location.

10

15

20

25

30

35

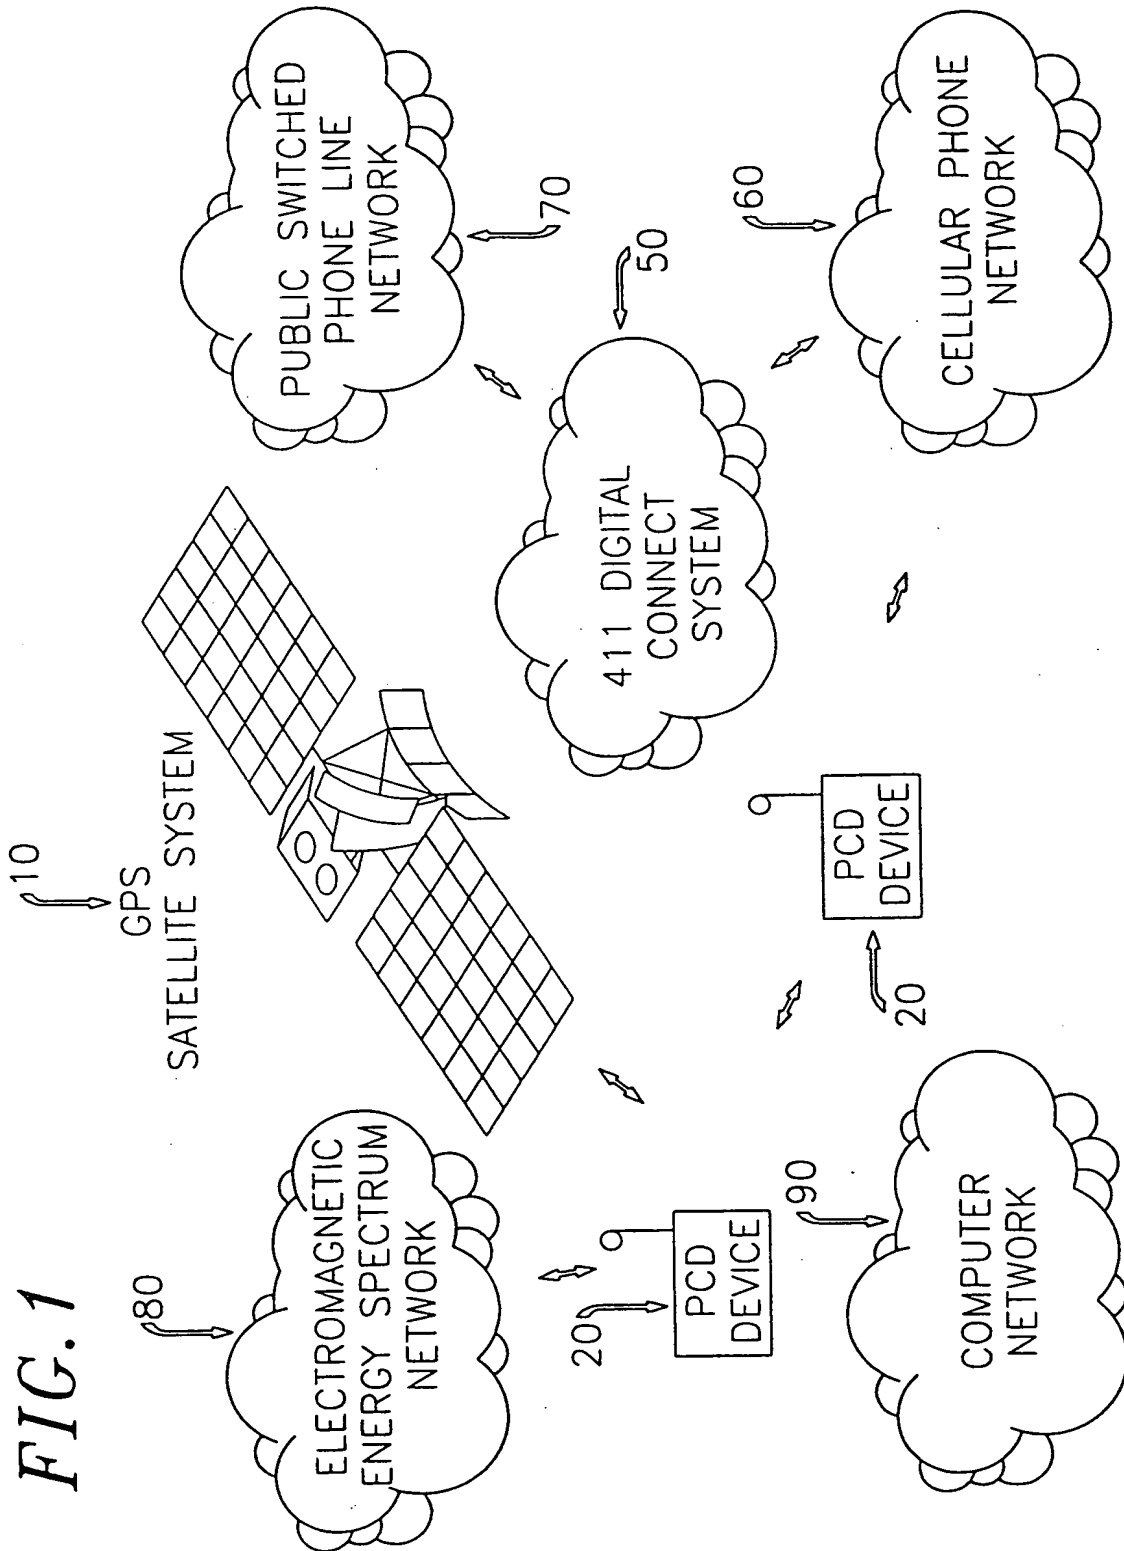


FIG. 2




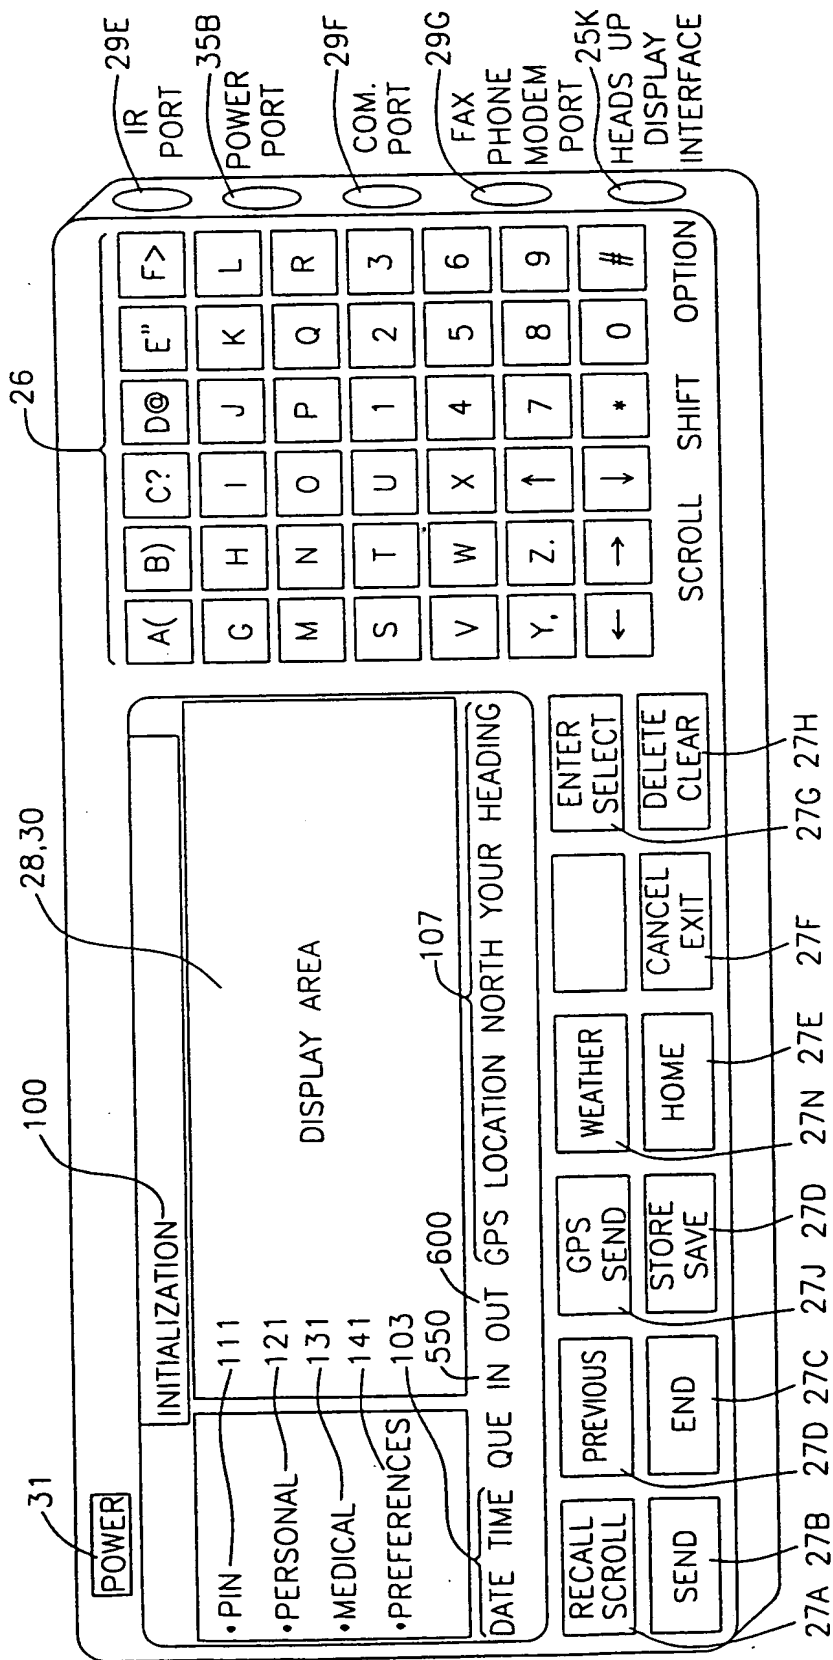


FIG. 3

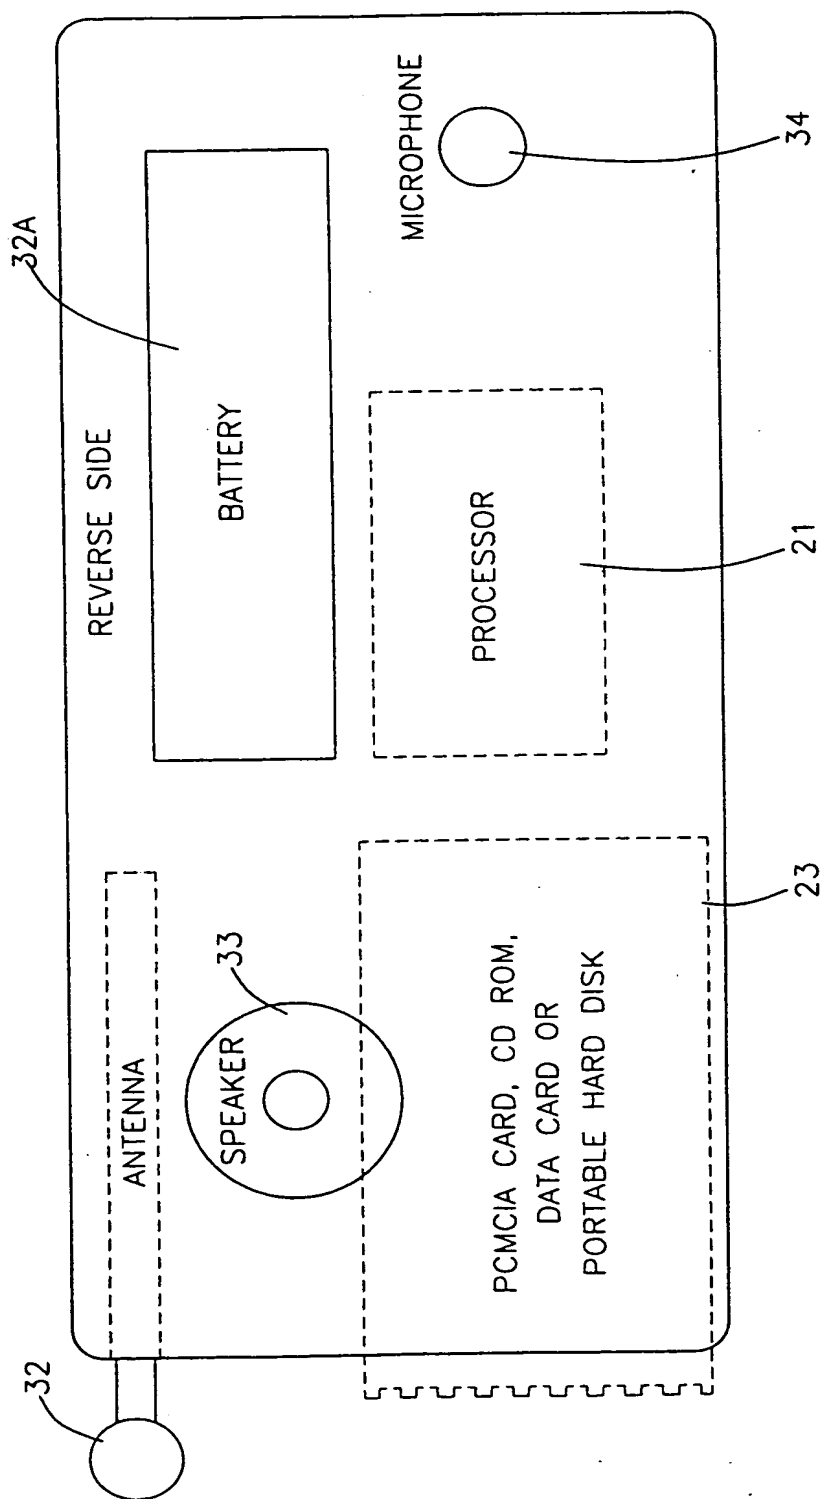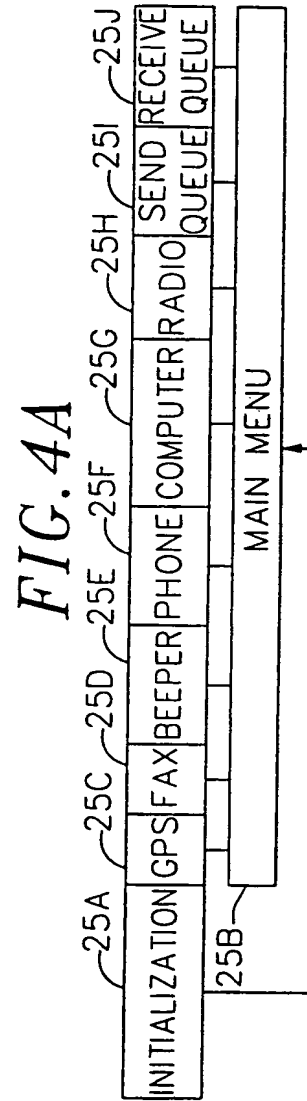

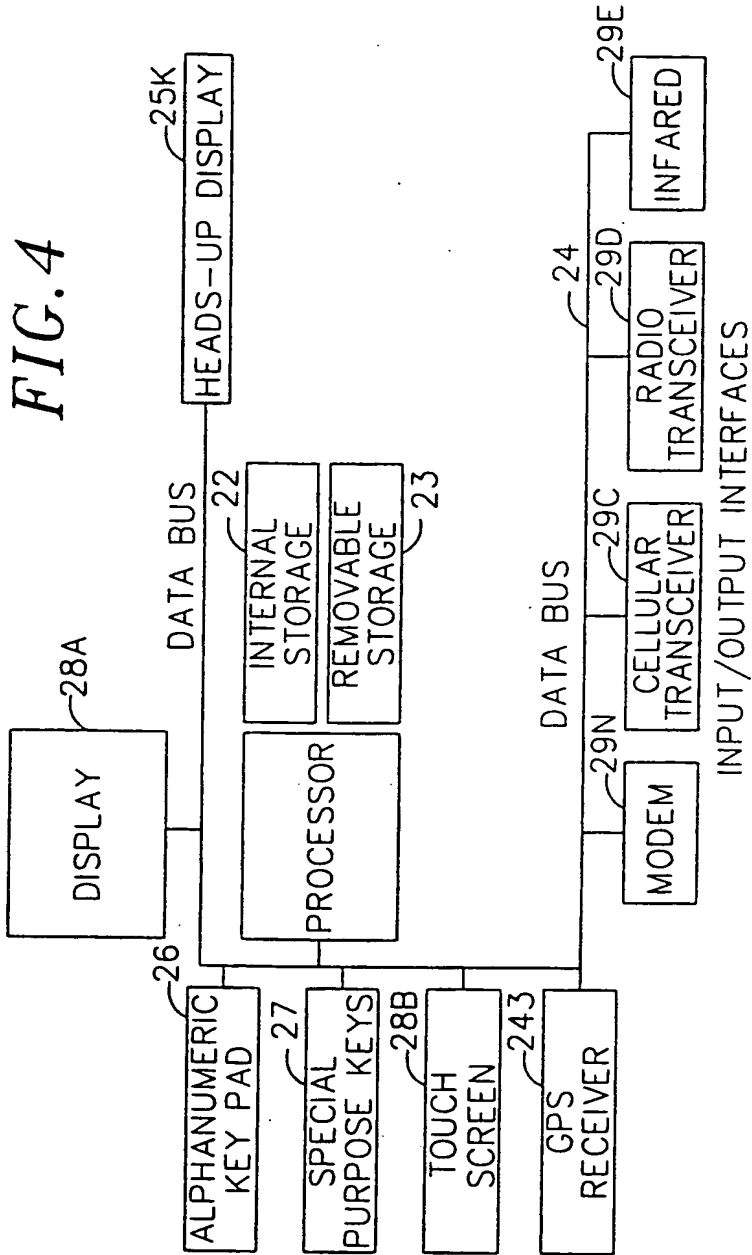

5/31

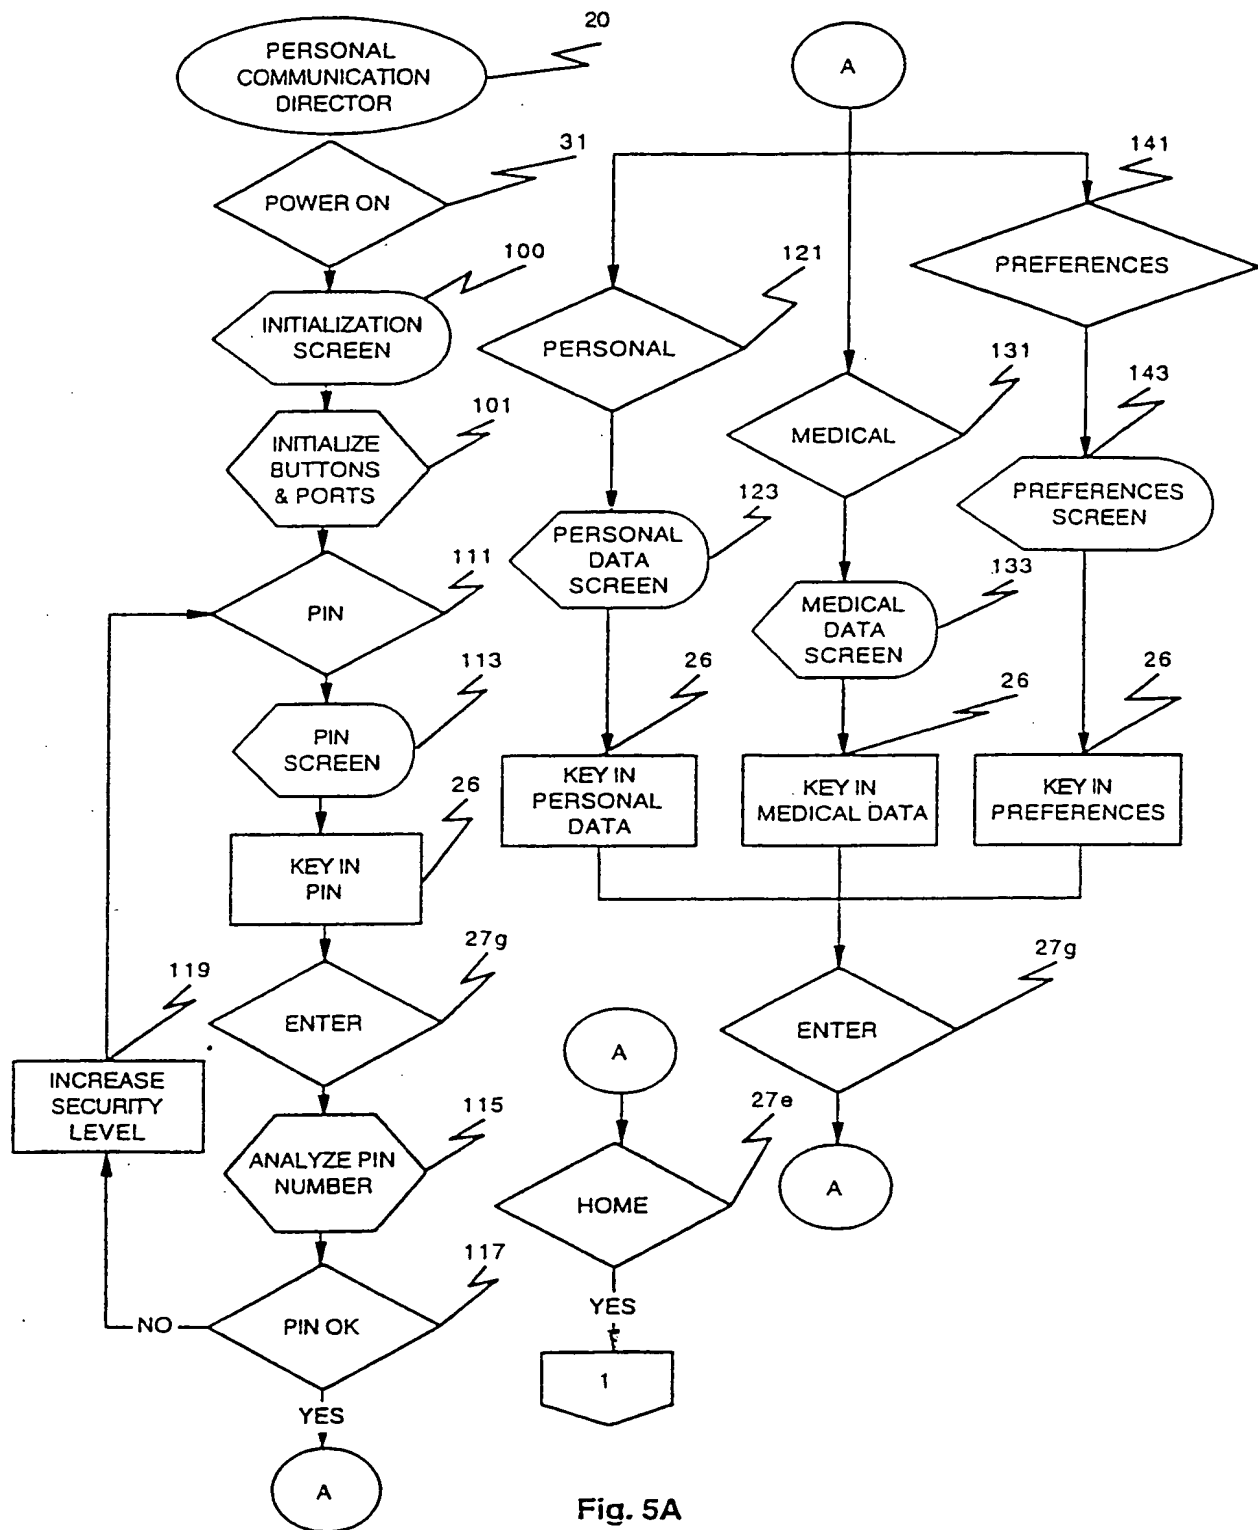


Fig. 5A

6/31

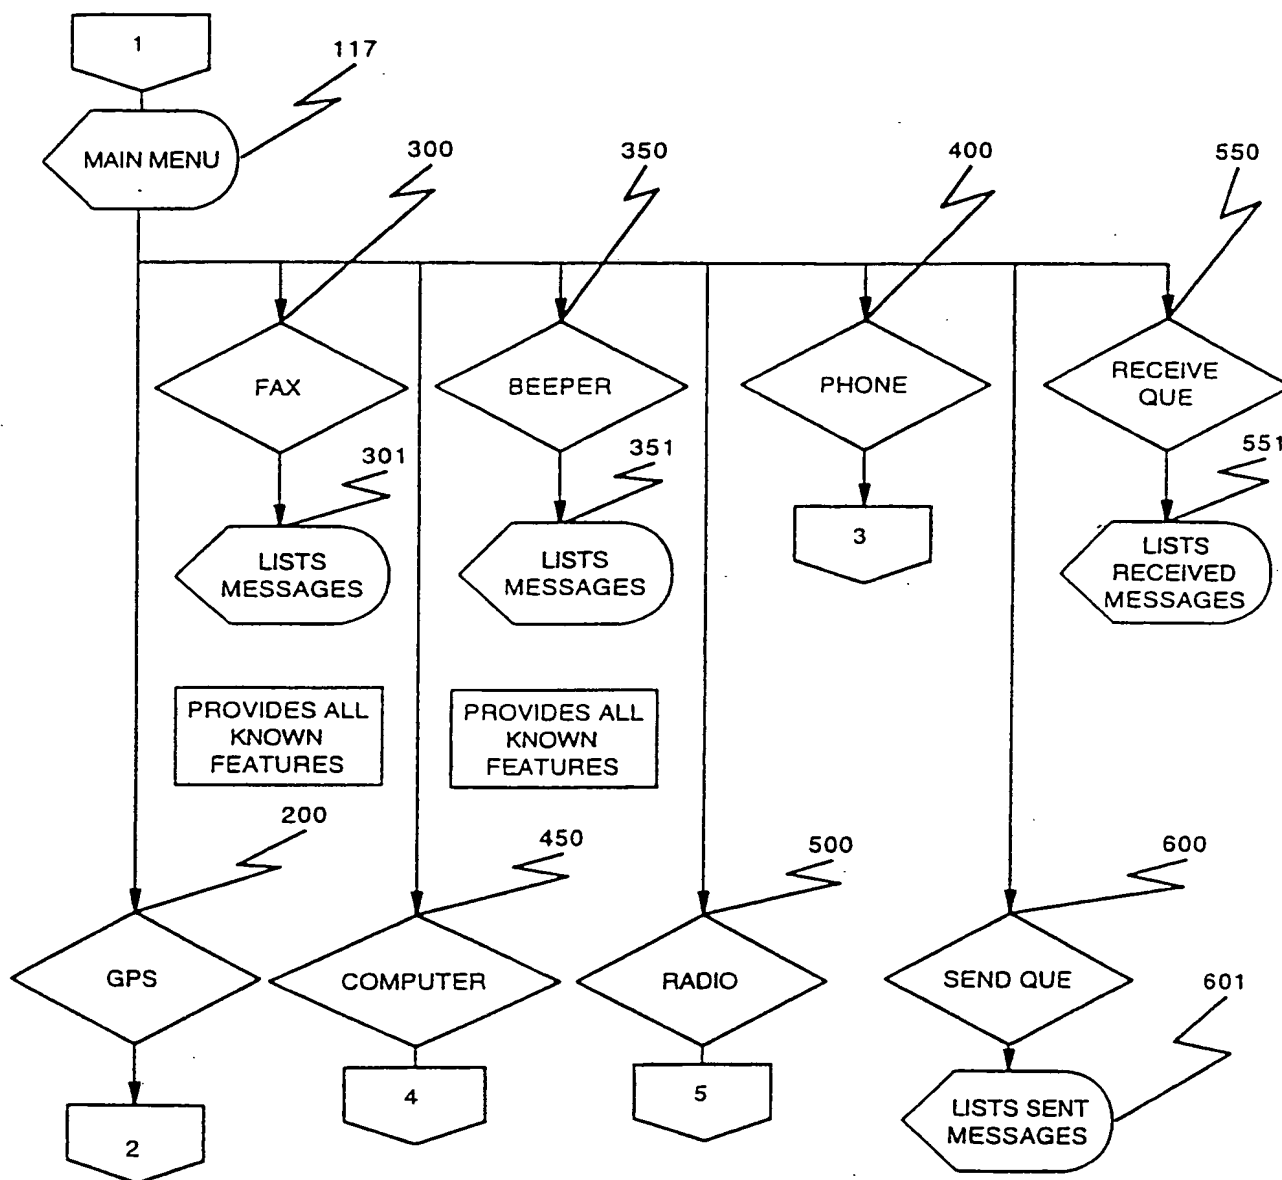


Fig. 5B

7/31

FIG. 5C

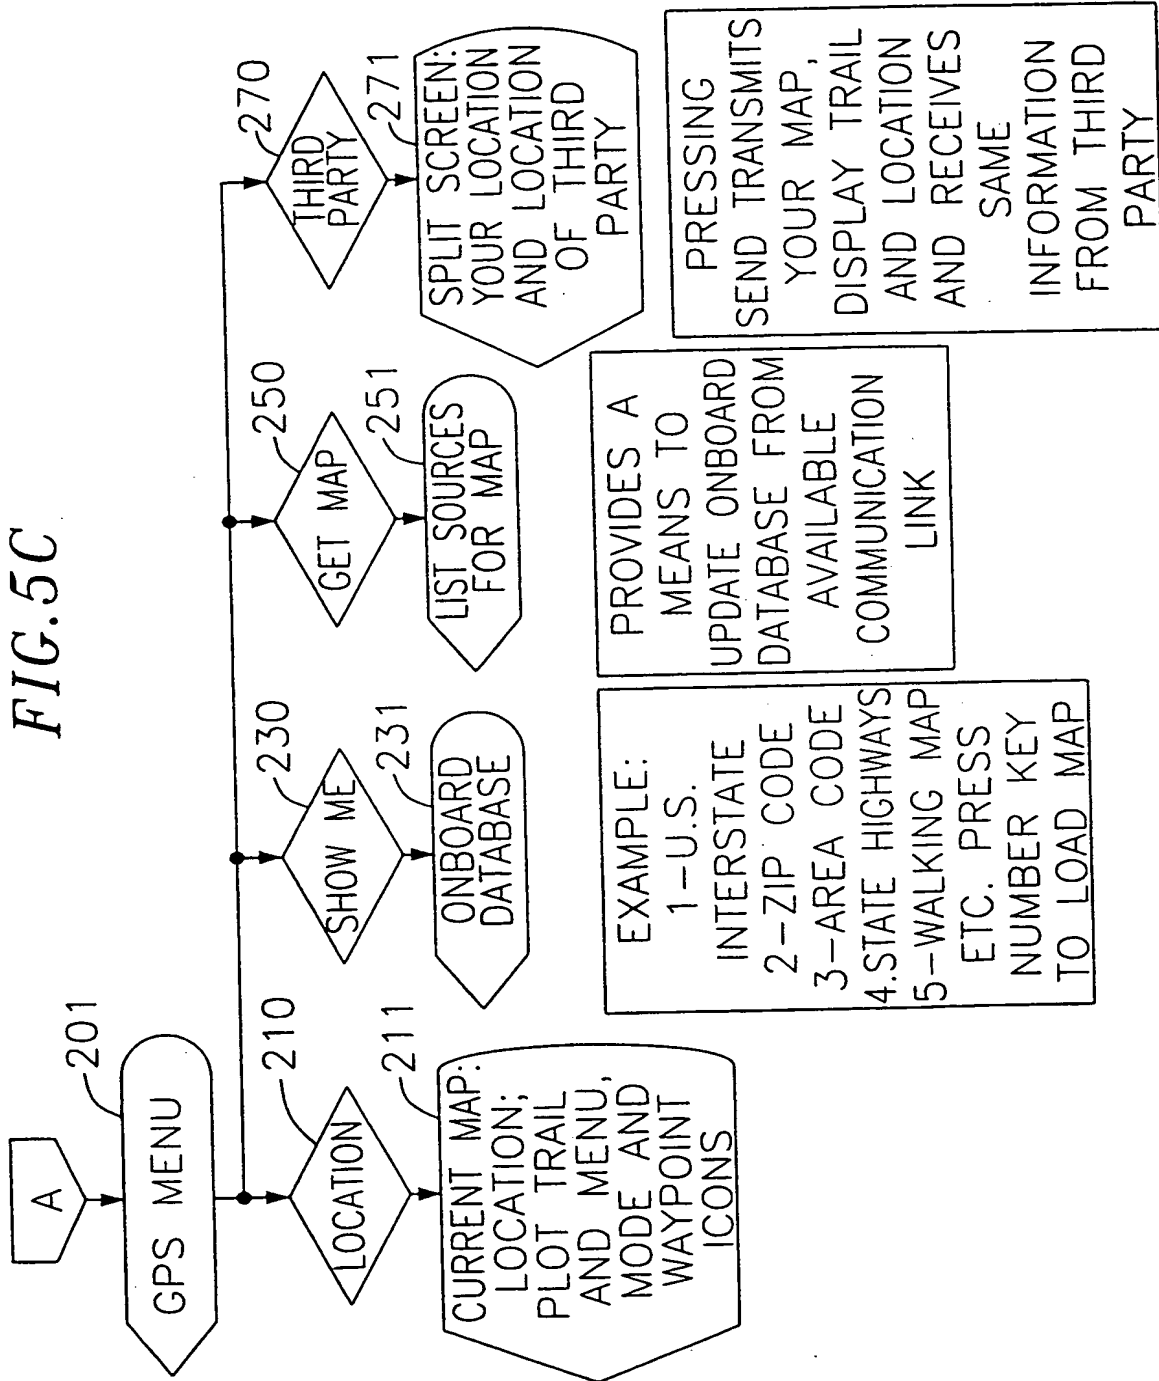


FIG. 5D



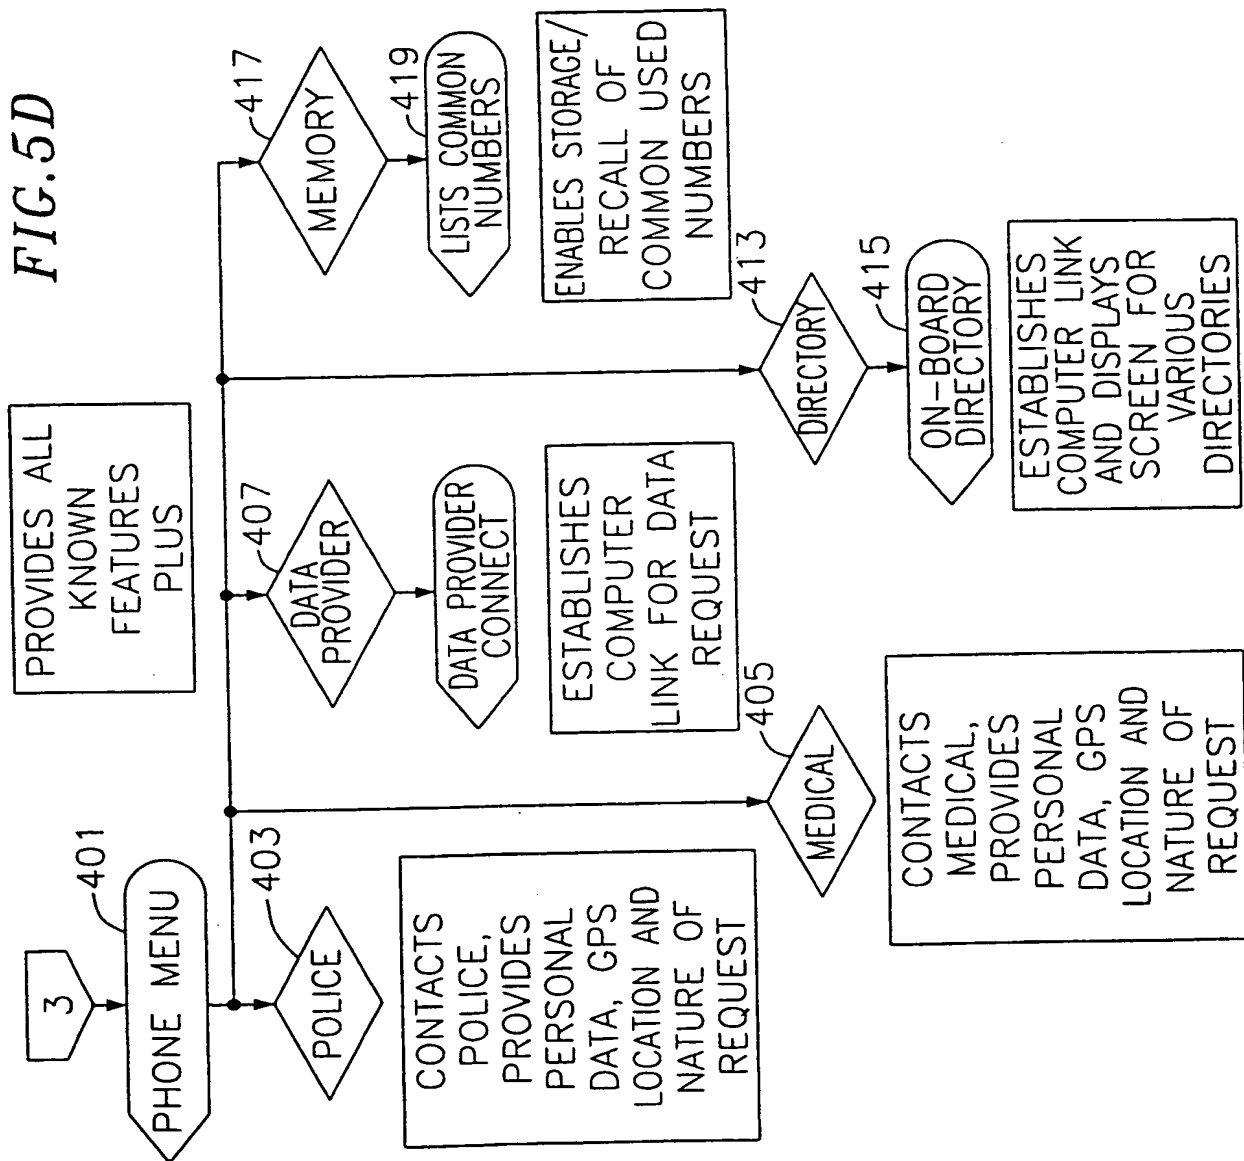


FIG. 5E

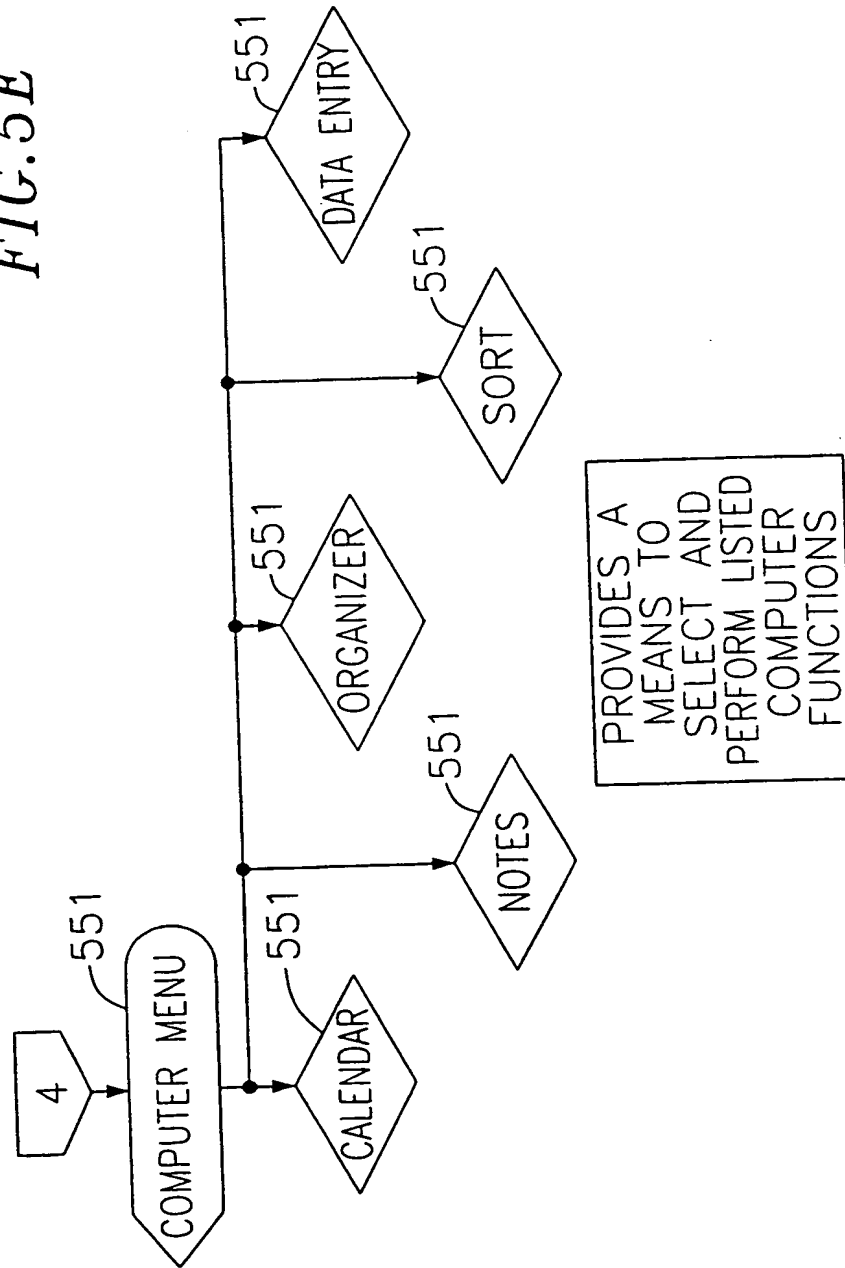

10/31

FIG. 5F

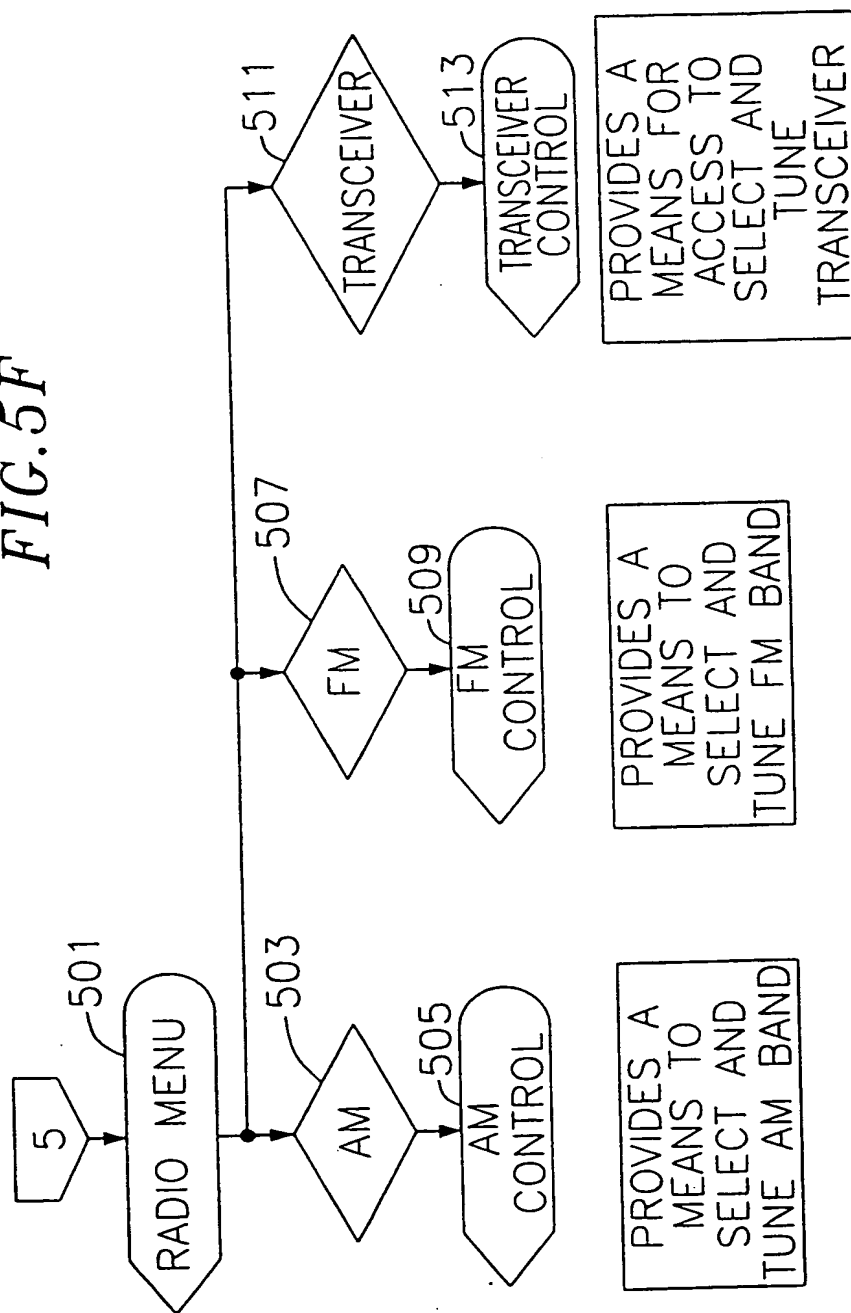

11/31

FIG. 6


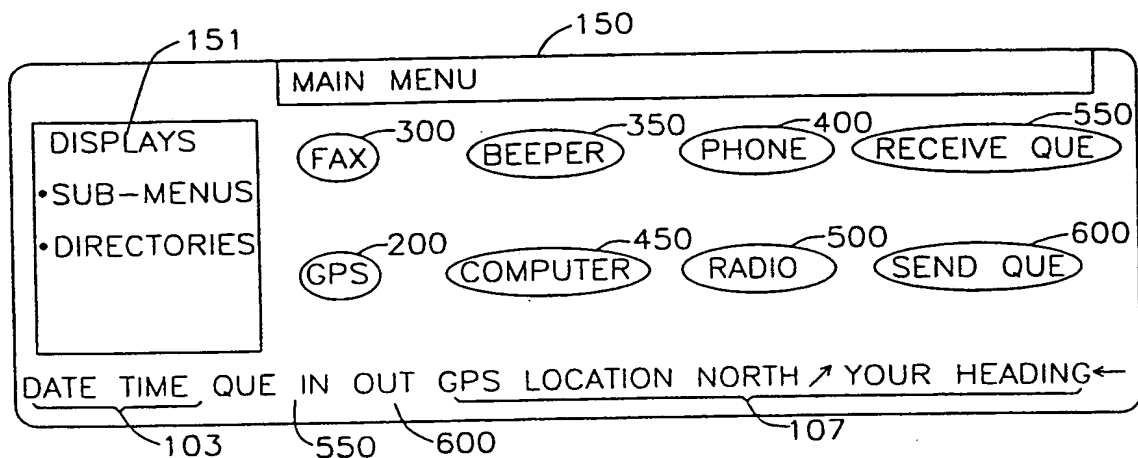


FIG. 7

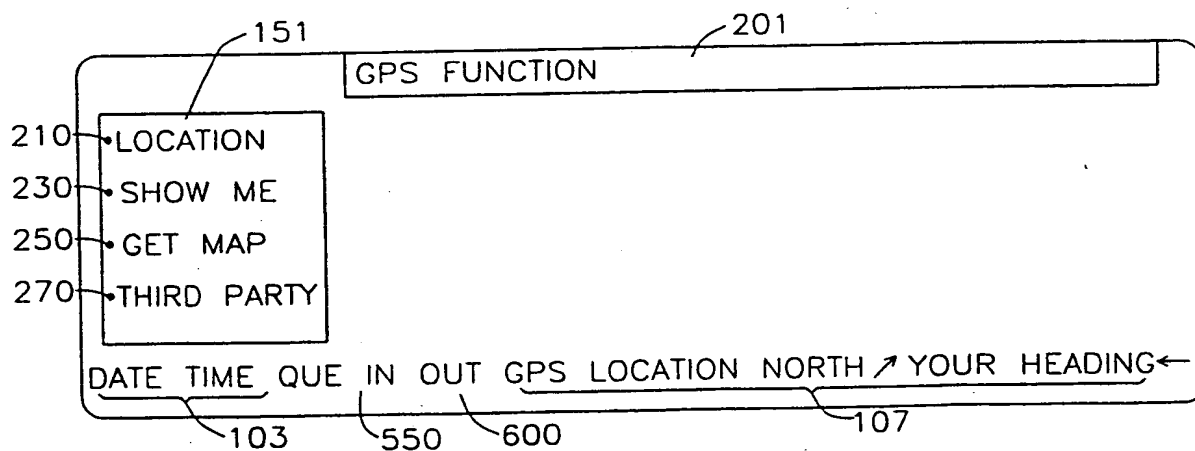

12/31

FIG. 8


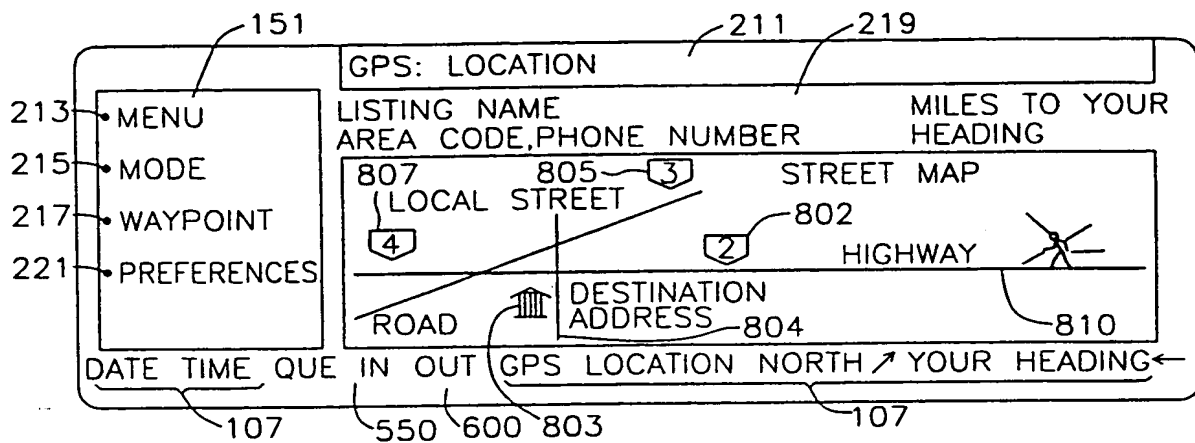


FIG. 9

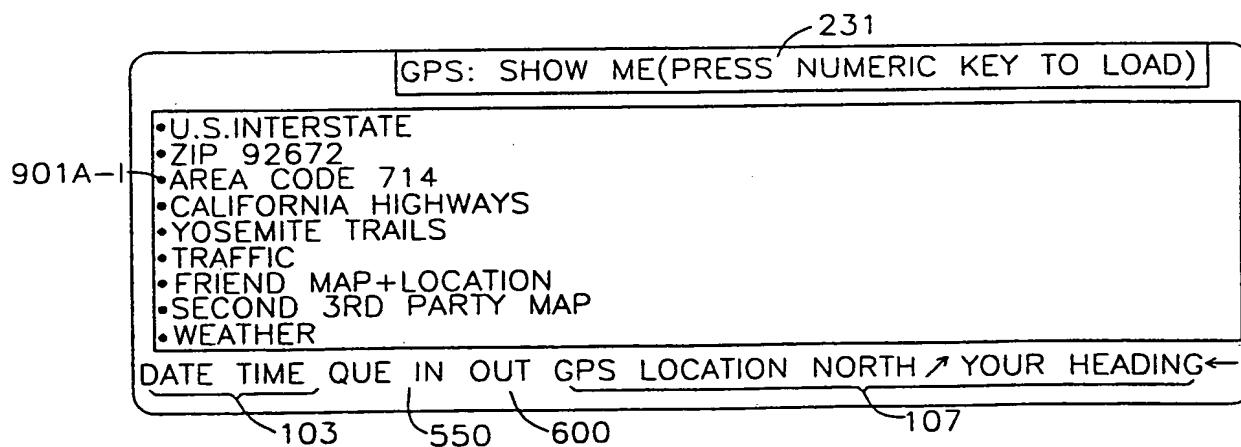

13/31

FIG. 10

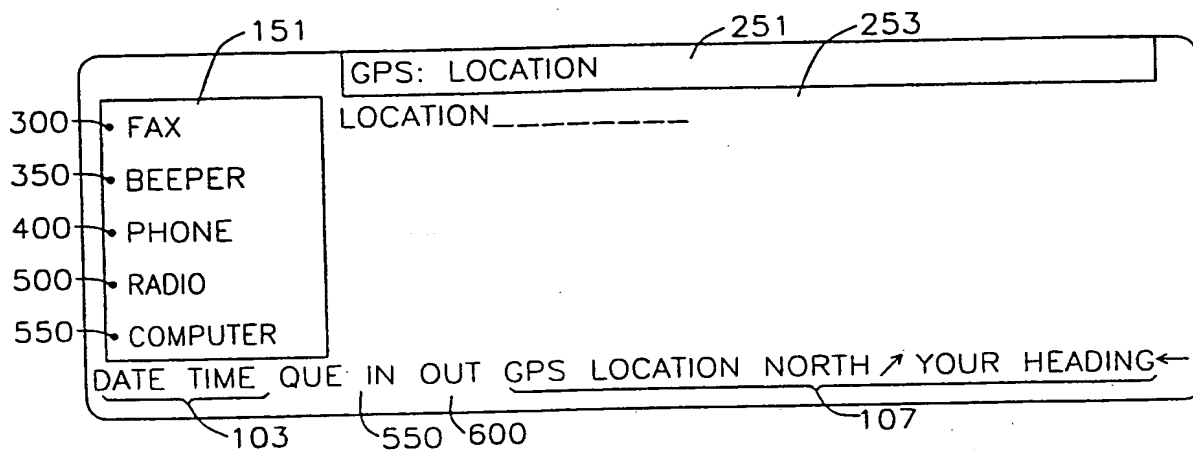


FIG. 11

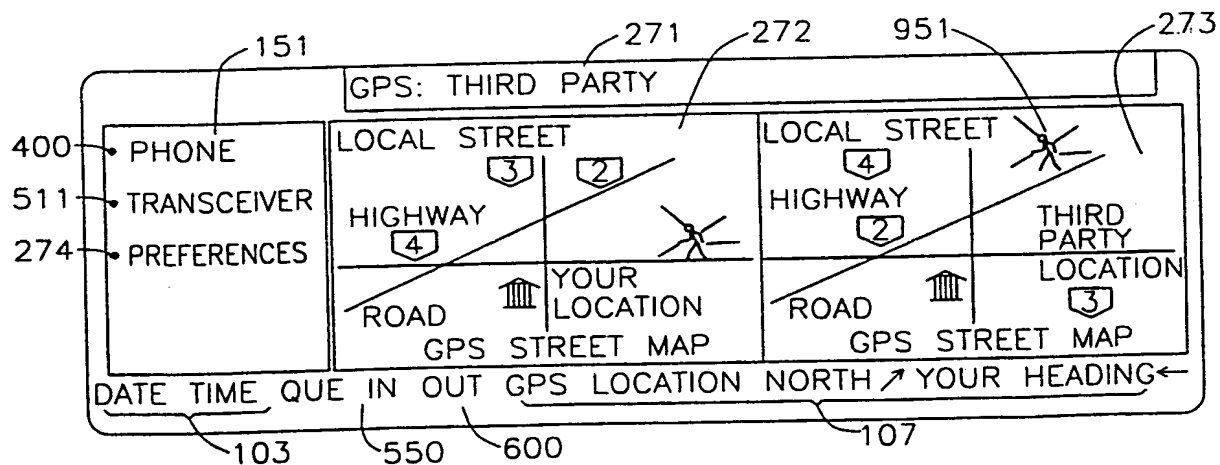


FIG. 12


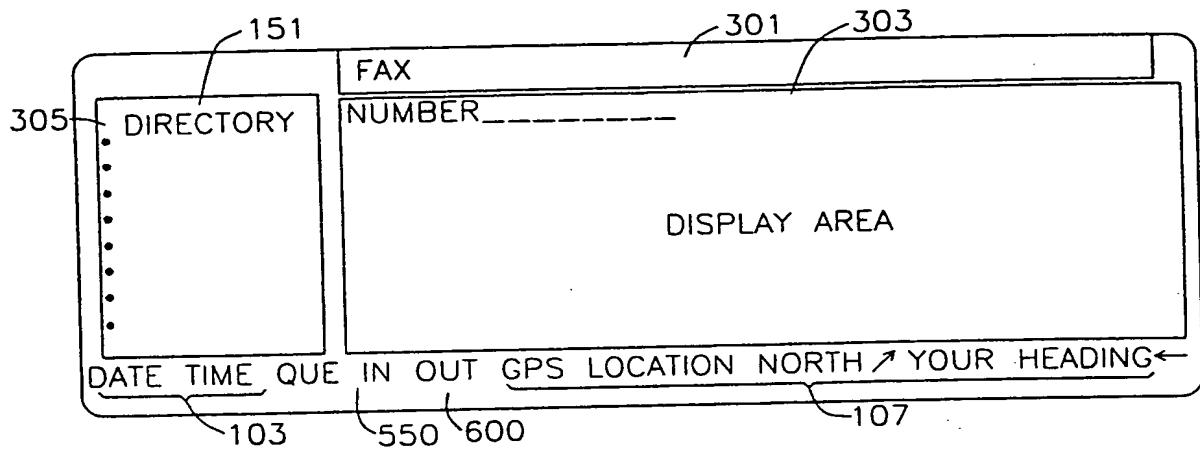


FIG. 13

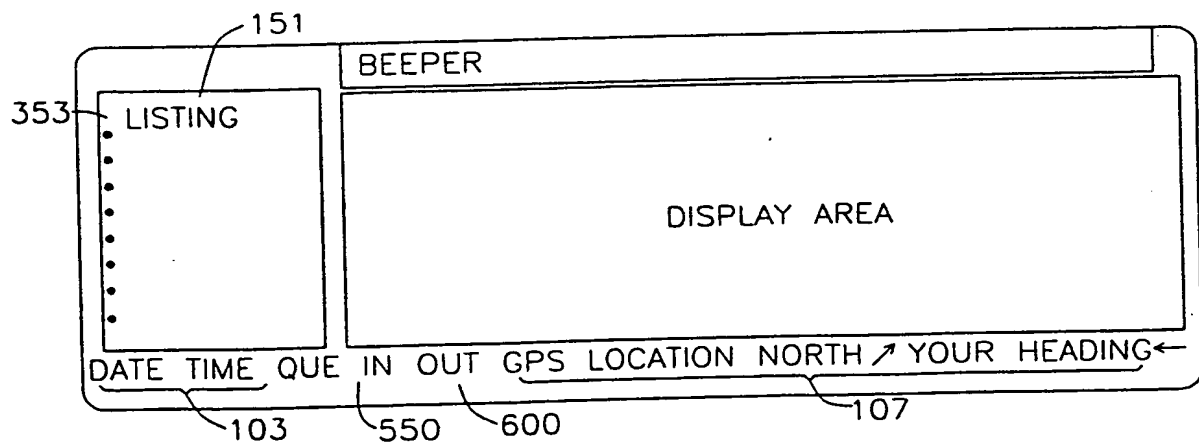

15/31

FIG. 14




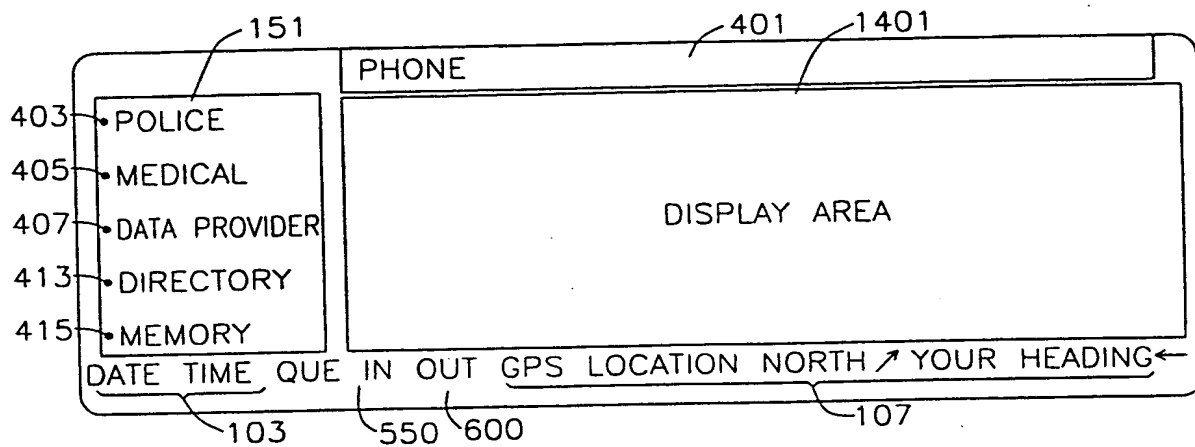


FIG. 15

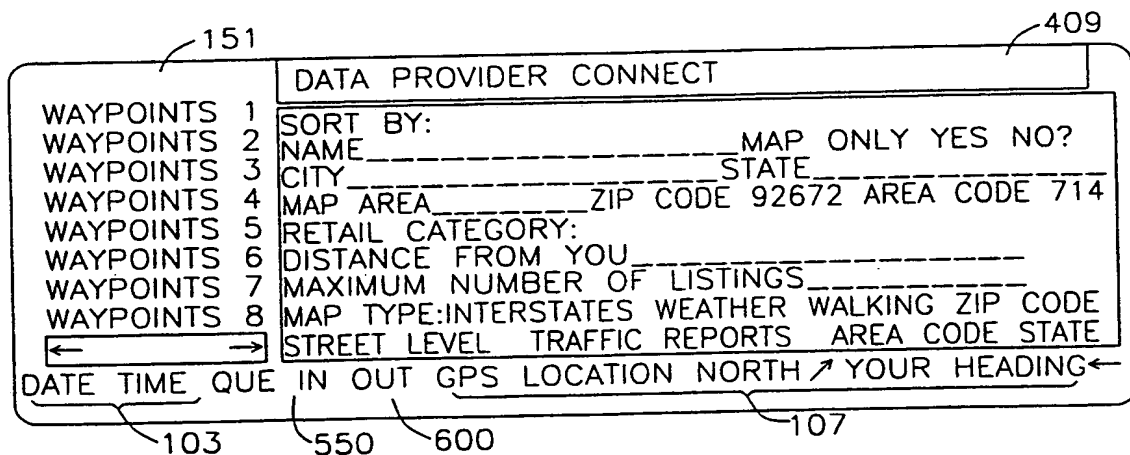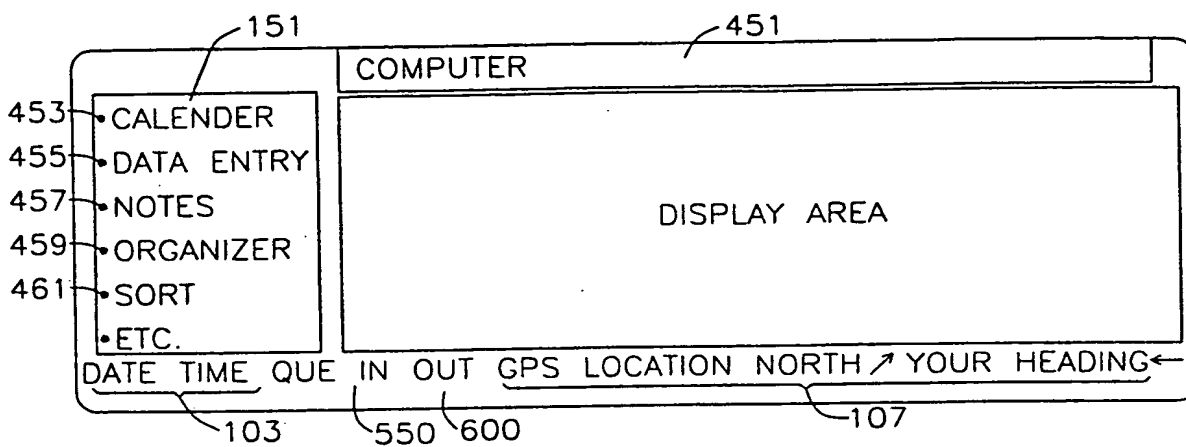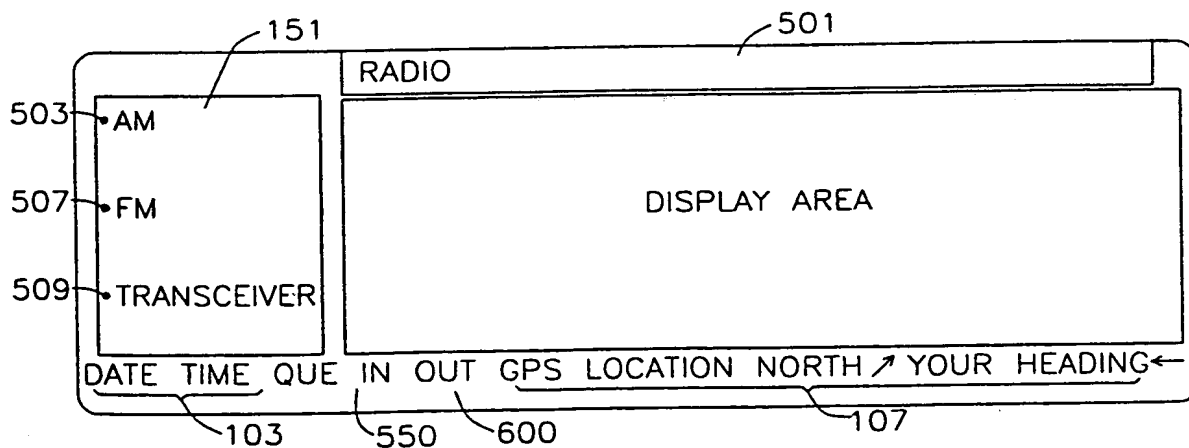

16/31

FIG. 16*FIG. 17*

17/31

FIG. 18

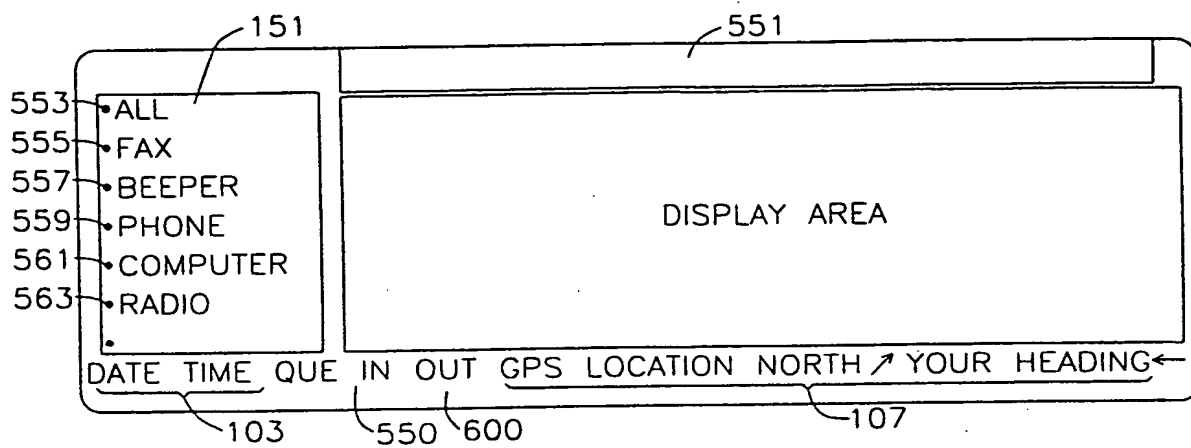


FIG. 19


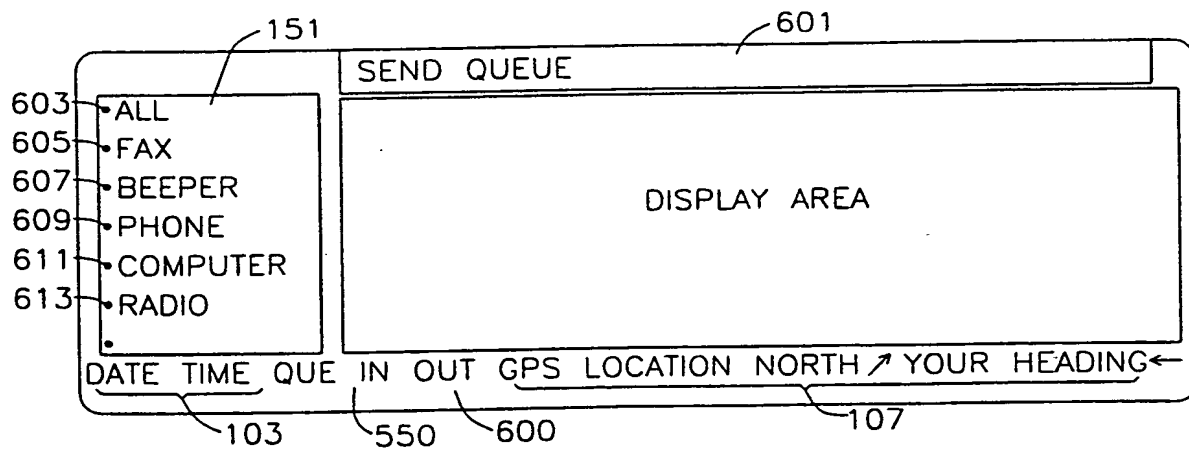


FIG. 20

LISTING / NAME / WAYPOINT	ADDRESS	CITY	STATE	PHONE NO	GPS LOCATION NORTH	GPS WEST	WAYPOINT
ALEX'S GERMAN-AMERICAN RESTAURANT	2801 S. EL CAMINO REAL	SAN CLEMENTE	CA	714-492-8986	33°24.60	117°36.25	1
ANTOINE'S CAFE	218 S. EL CAMINO REAL	SAN CLEMENTE	CA	714-492-1763	33°25.40	117°37.38	2
BAKERS'S SQUARE RESTAURANT & PIES	610 CAMINO DE LOS MARES	SAN CLEMENTE	CA	714-661-3100	33°27.80	117°39.60	3
BEACH GARDEN CAFE	618 1/2 AVENIDA VICTORIA	SAN CLEMENTE	CA	714-498-8145	33°25.35	117°37.36	4
BOOTLEGGERS GRILL & SPEAKEASY	111 AVE. PALIZADA	SAN CLEMENTE	CA	714-361-8658	33°25.65	117°37.85	5
BURBON STREET SANDWICHERY	430 N. EL CAMINO REAL	SAN CLEMENTE	CA	714-492-7827	33°25.58	117°37.76	6
BURGER STOP	524 AVENIDA PICO	SAN CLEMENTE	CA	714-492-2350	33°25.92	117°37.12	7
BURRITO BASKET, THE	2017 S. EL CAMINO REAL	SAN CLEMENTE	CA	714-498-5002	33°25.10	117°36.34	8
CAFE CALYPSO	114 AVENIDA DEL MAR	SAN CLEMENTE	CA	714-366-9346	33°25.42	117°37.42	9
CAFE EXPRESSO	641 CAMINO DE LOS MARES	SAN CLEMENTE	CA	714-240-3467	33°25.81	117°37.31	10
CAPTAIN CULVER COUNTERCULTURE NATURAL FOODS	149 AVENIDA DEL MAR	SAN CLEMENTE	CA	714-498-8098	33°25.39	117°37.40	11
CARL'S JR. RESTAURANT	638 CAMINO DE LOS MARES	SAN CLEMENTE	CA	714-493-0189	33°27.65	117°39.45	12
CARL'S JR. RESTAURANT	3929 S. EL CAMINO REAL	SAN CLEMENTE	CA	714-498-5641	33°24.50	117°35.95	13
CARROWS RESTAURANT	620 AVENIDA PICO	SAN CLEMENTE	CA	714-492-4290	33°25.85	117°37.10	14
CHINA BEACH CANTEEN	2369 S. EL CAMINO REAL	SAN CLEMENTE	CA	714-492-6228	33°27.80	117°37.15	15
CHINA WELL RESTAURANT	620 CAMINO DE LOS MARES	SAN CLEMENTE	CA	714-661-6813	33°27.61	117°39.42	16
COCO'S FAMILY RESTAURANT	2350 S. EL CAMINO REAL	SAN CLEMENTE	CA	714-498-1542	33°24.90	117°36.18	17
CORKY'S CAFE	2727 VIA CASCADITA	SAN CLEMENTE	CA	714-492-1135	33°25.10	117°37.48	18
COURTSIDE RESTAURANT	111 AVE. VISTA MONTANA	SAN CLEMENTE	CA	714-361-2211	33°25.10	117°36.10	19
DAVE'S MEXICAN RESTAURANT	1701 N. EL CAMINO REAL	SAN CLEMENTE	CA	714-492-7867	33°25.50	117°38.90	20
DEL TACO	109 CALLE DE INDUSTRIAS	SAN CLEMENTE	CA	714-492-5311	33°25.51	117°36.50	21
DENNY'S RESTAURANT	529 AVENIDA PICO	SAN CLEMENTE	CA	714-492-2382	33°25.48	117°36.15	22
DOMINOES PIZZA	1502 N. EL CAMINO REAL	SAN CLEMENTE	CA	714-498-9002	33°25.25	117°37.50	23
EASTERN WINDS	201 N. EL CAMINO REAL	SAN CLEMENTE	CA	714-492-3008	33°25.01	117°37.05	24
EL CAMINO TACOS	420 S. EL CAMINO REAL	SAN CLEMENTE	CA	714-366-8358	33°25.10	117°37.25	25
EL JEFE CAFE	106 E. ESCALONES	SAN CLEMENTE	CA	714-492-4010	33°25.25	117°37.03	26
EL MIRADOR	301 N. EL CAMINO REAL	SAN CLEMENTE	CA	714-366-0855	33°25.08	117°37.10	27

19/31

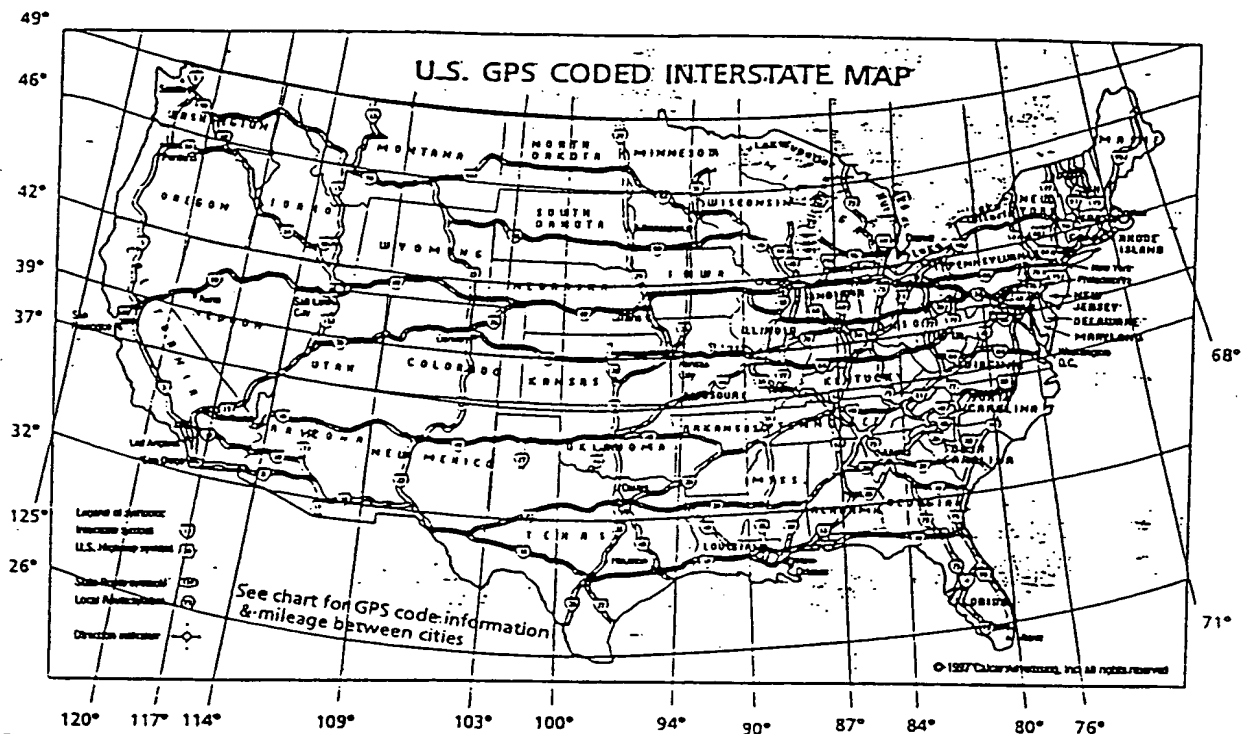

1115

ONE INCH EQUALS 400 MILES APPROXIMATELY

- Longitude and latitude coordinates.
- Area code boundaries.
- Zip code boundaries.
- National park boundaries.
- Metro traffic zones.
- Interstate boundaries.
- US Highway boundaries.
- State route boundaries.
- City, county, state, province boundaries.
- Political boundaries.
- Economic, retail, business zone boundaries.

GPS encoded embodiments *are not* limited to the above examples and may include many other systems using various recording techniques.

Fig. 21

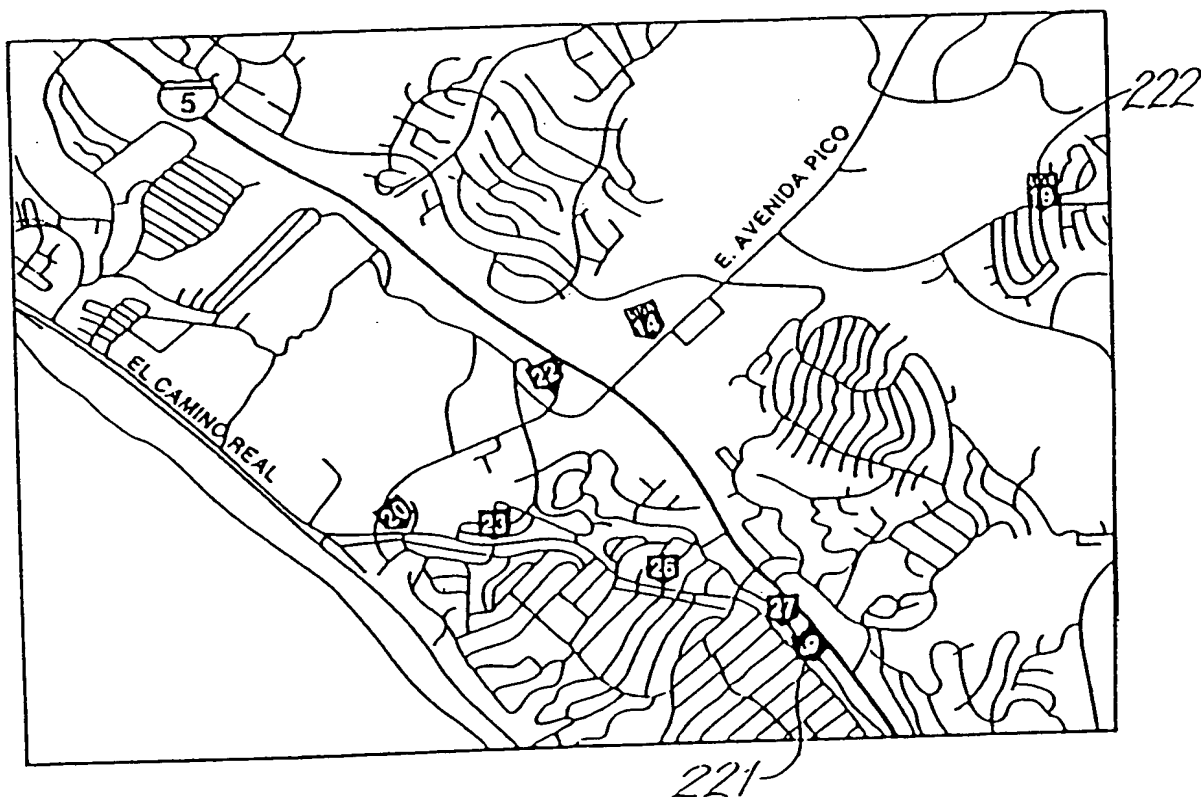


Fig. 22

21/31

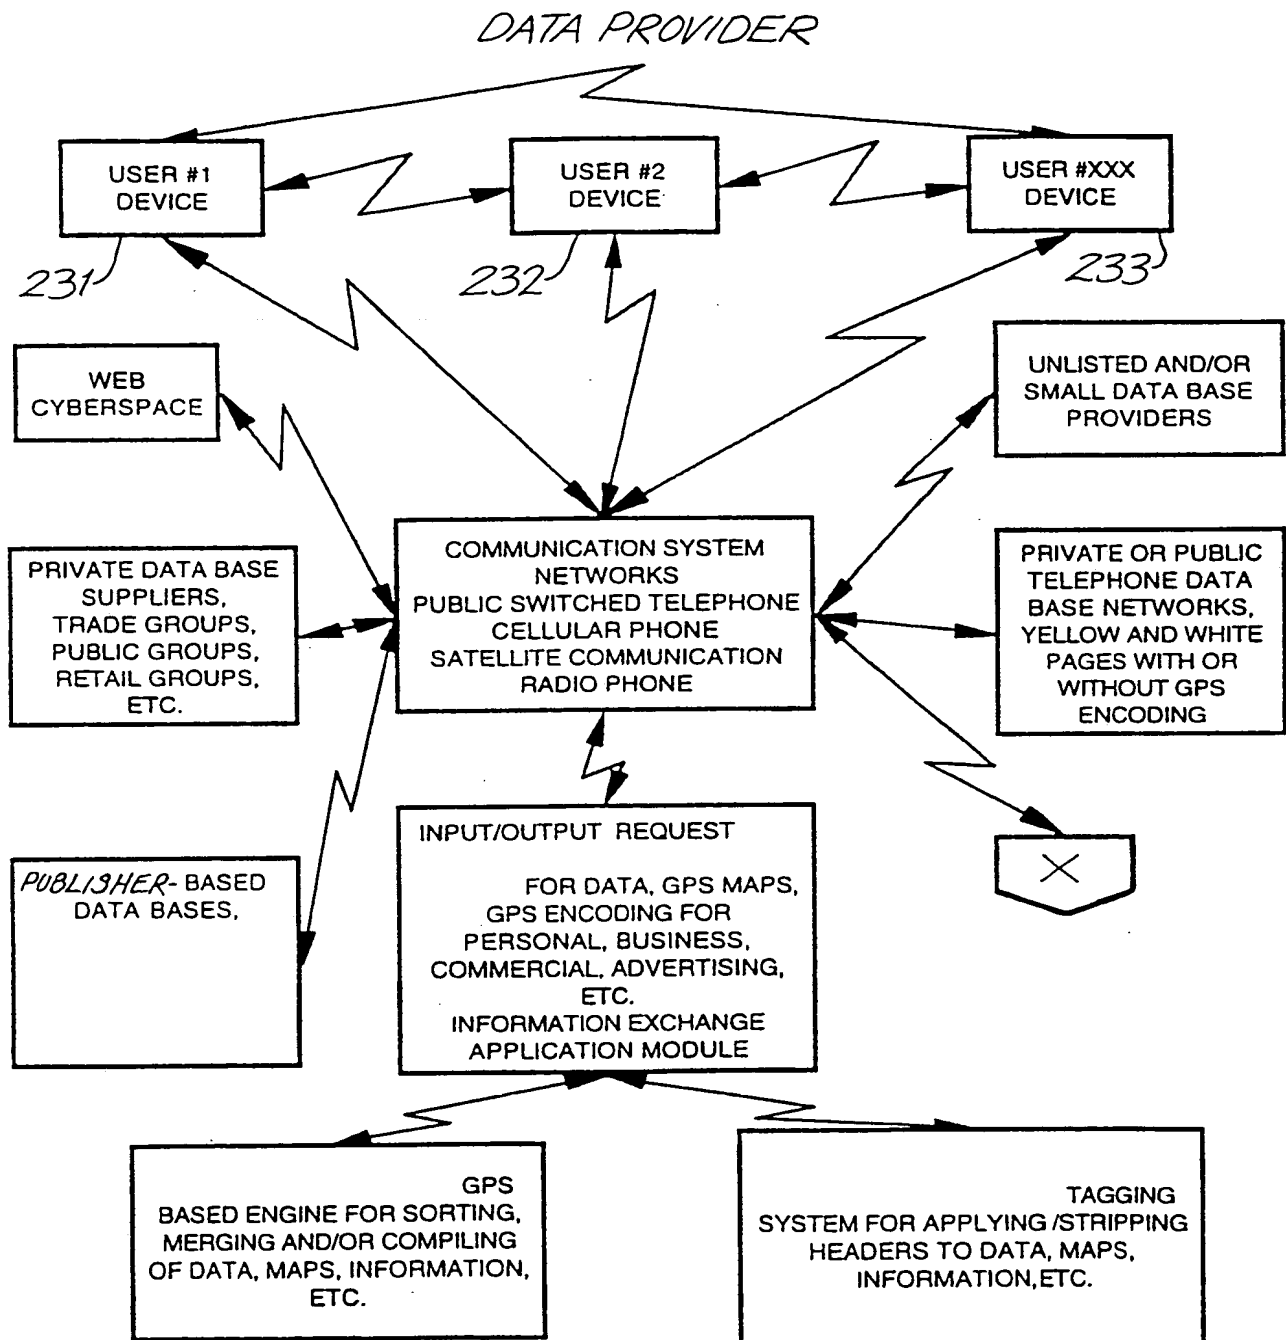
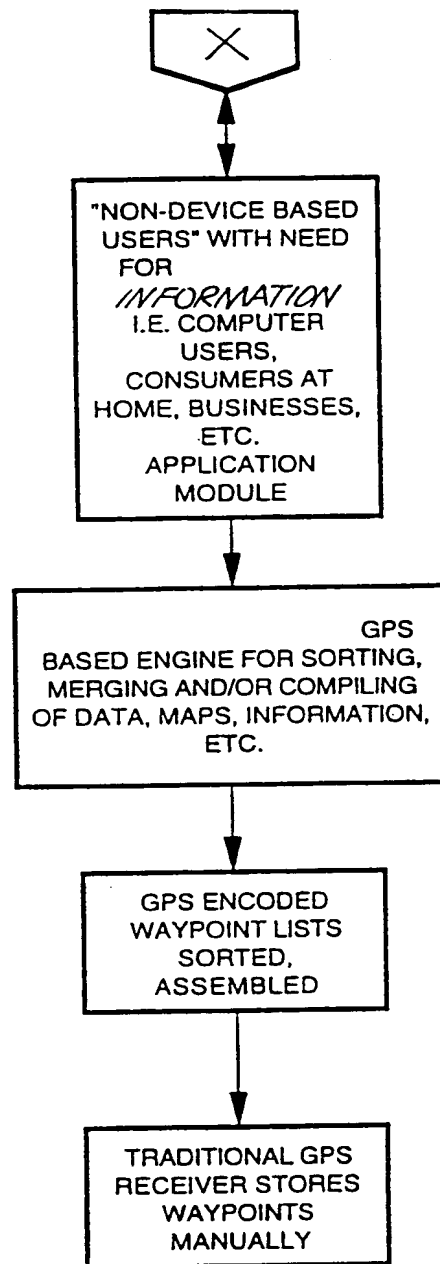


Fig. 23A

22/31

*Fig. 23B*

REQUESTER

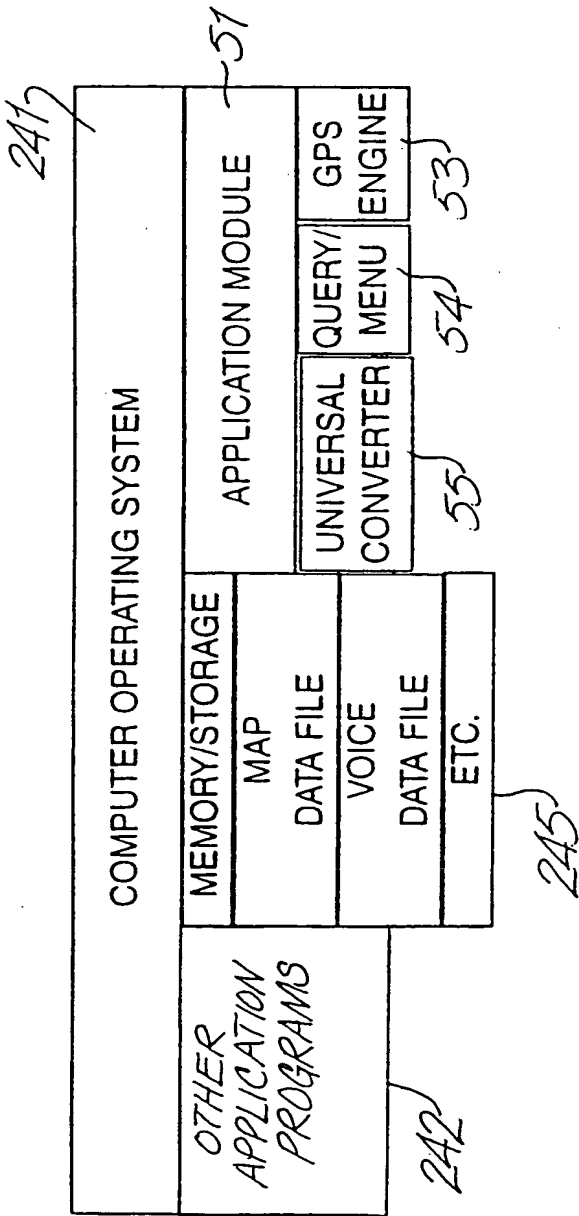


Fig. 24

PROVIDER

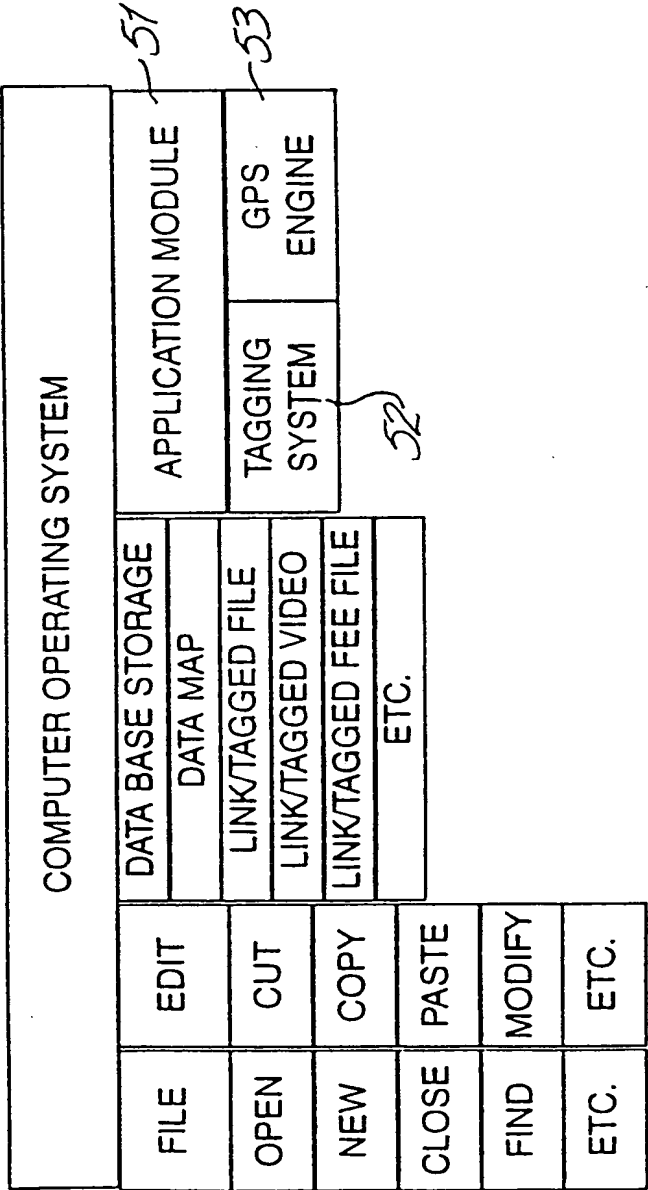


Fig. 25

25/31

APPLICATION MODULE

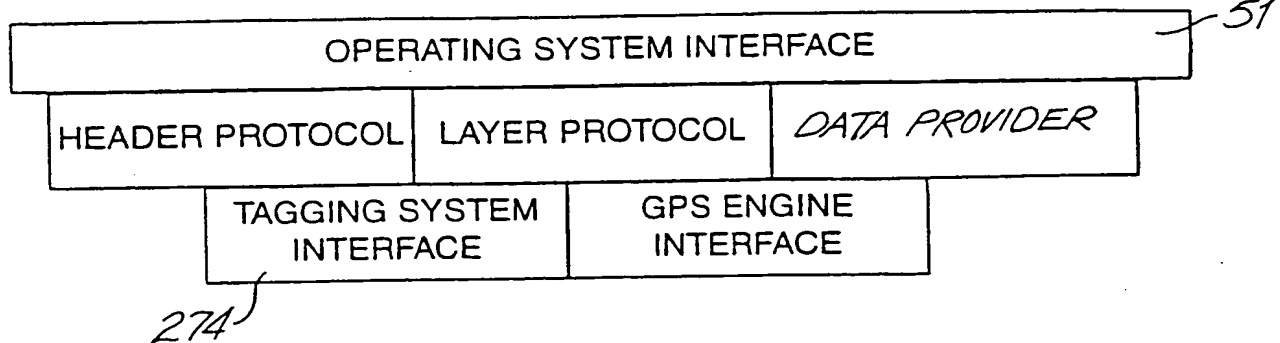


Fig. 26

TAGGING SYSTEM

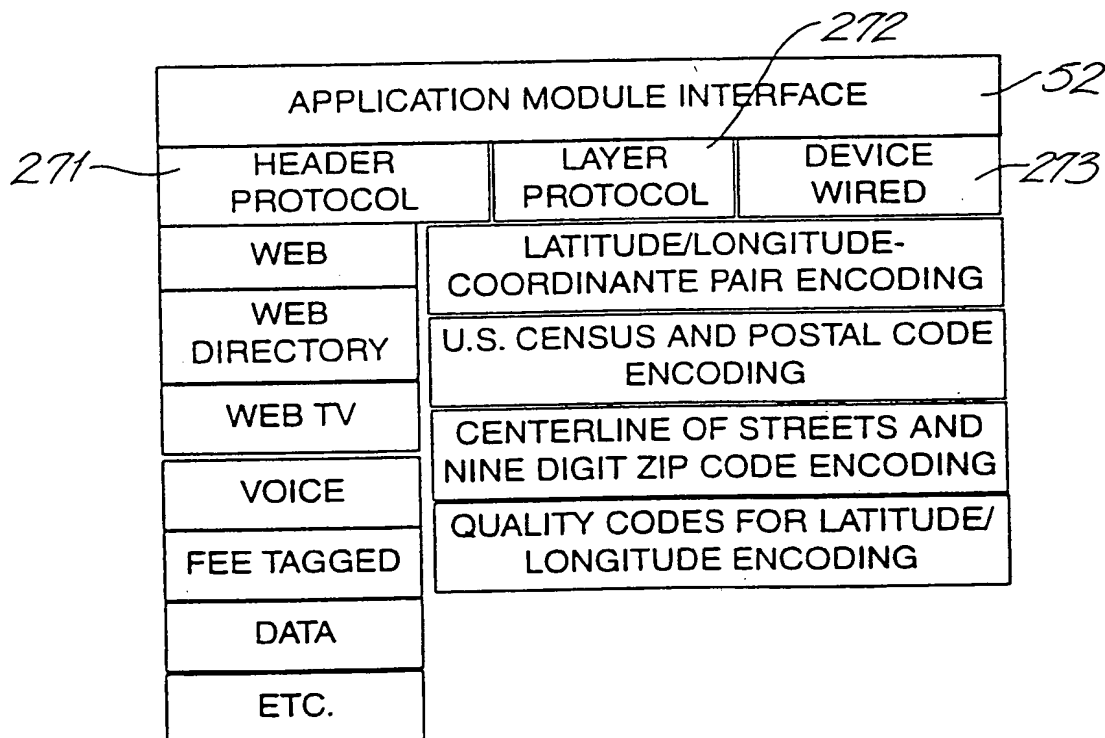


Fig. 27


GPS ENGINE


-53

APPLICATION MODULE INTERFACE			
HEADER PROTOCOL	LAYER SYSTEM	ACCESS LATITUDE/LONGITUDE QUALITY CODES FOR BEST DISPLAY SCALES	
TAG TYPE	LAYER PROTOCOL	USE SPATIAL QUERY FUNCTIONS	
LATITUDE/ LONGITUDE	ROUTE PLANNING	USE CENTROID INTERPOLATION FUNCTIONS	
RADIUS		USE MATCH-RATE COMPARISON FUNCTIONS	
MAP			
WAYPOINT LINKS			
ETC.			

Fig. 28

27/31

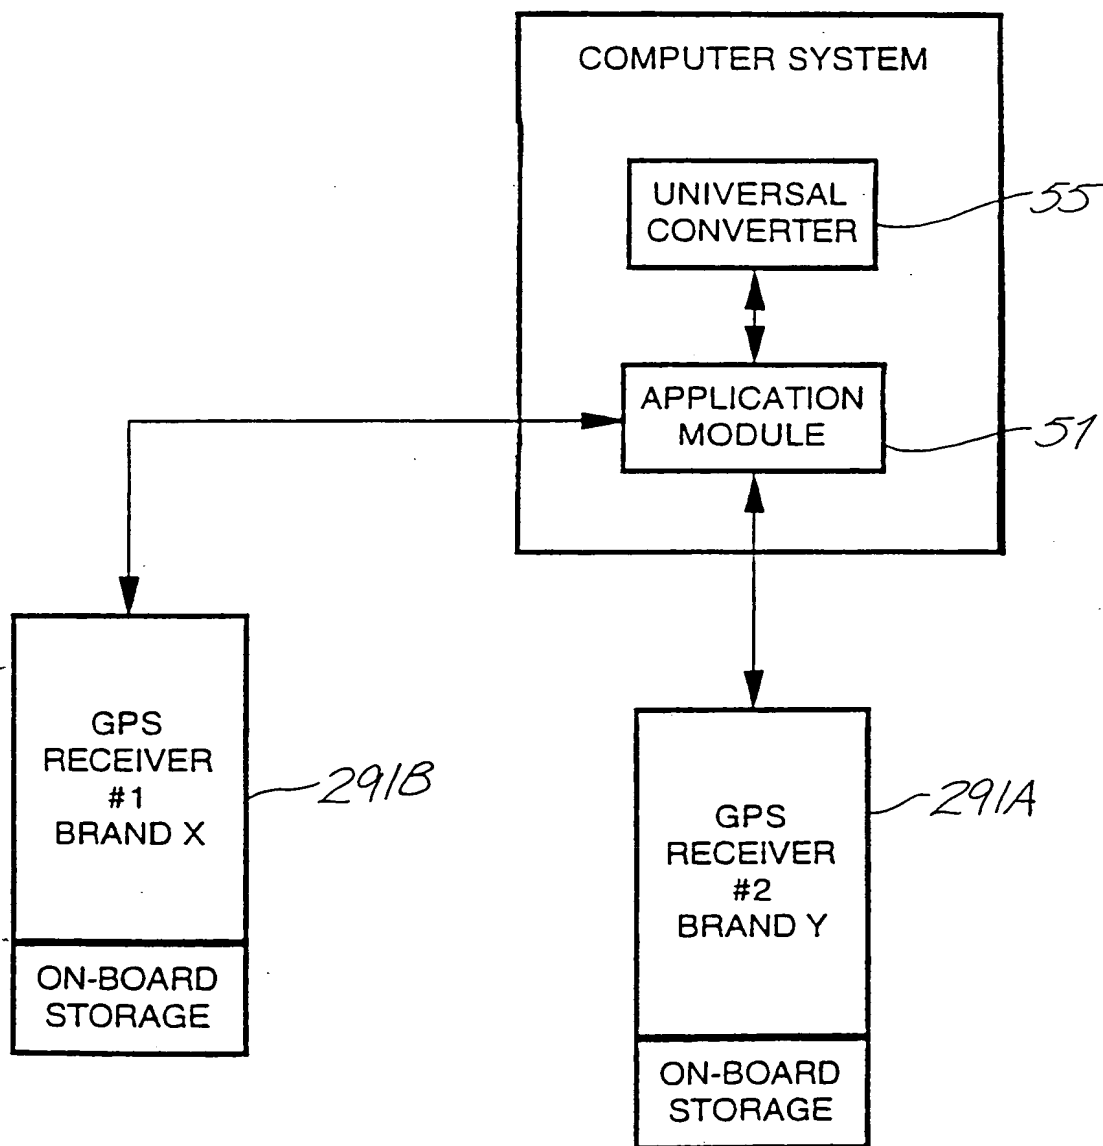UNIVERSAL
TRANSLATOR**Fig. 29**

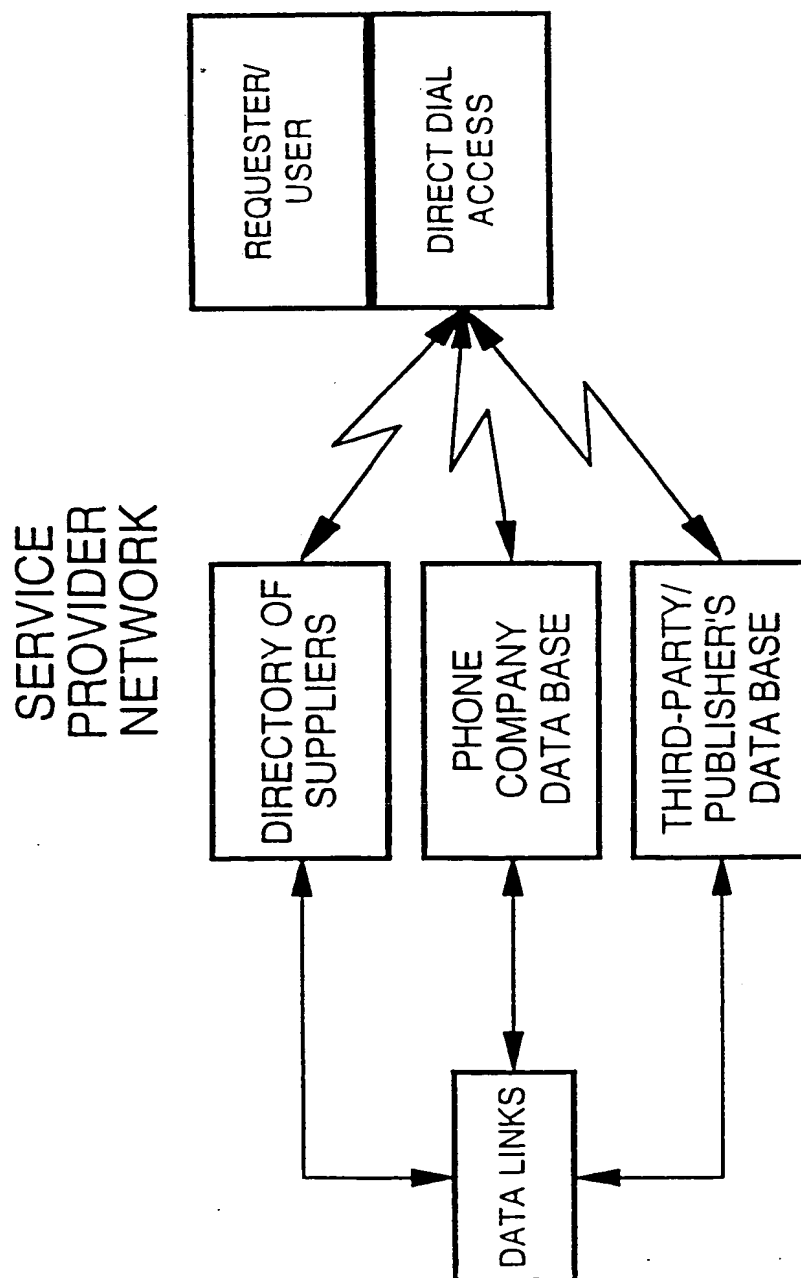*Fig. 30*

DIGITAL WEB TV

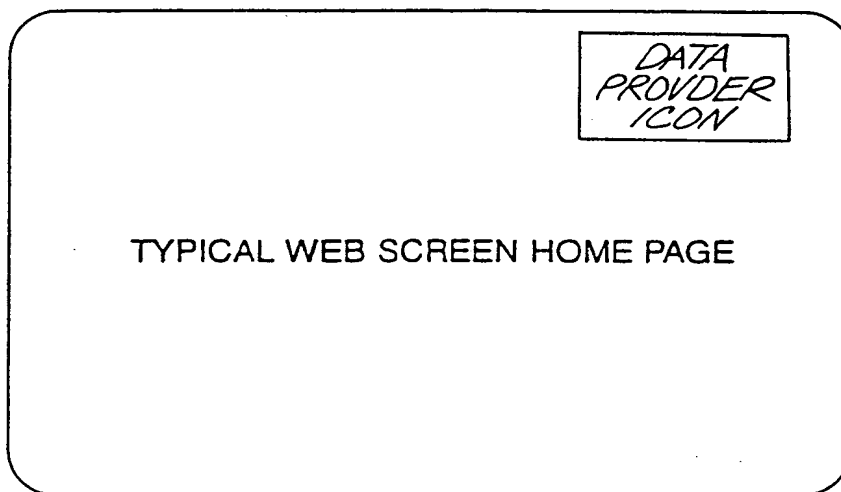


Fig. 31

30/31

FIG.32

321A-M

US SATELLITE RADAR CURRENT DELTA RADAR LOCAL RADAR SURFACE MAPS WIND CHILL CURRENT TEMPS. JET STREAM TRAVEL HAZARDS FORECASTS SURFACE WINDS FARM SHORT RANGE <div style="border: 1px solid black; width: 100px; height: 15px; margin: 5px 0;"></div> DATE TIME QUE	WEATHER MAP PROVIDER (PRESS TO UPDATE) CENTER MAP BY: CITY _____ STATE _____ LAYER MAPS _____ ZIP CODE _____ AREA CODE _____ DISTANCE FROM YOU _____ MILES/KILOMETERS DISTANCE FROM _____ MILES MAP TYPE: (PRESS TO SELECT FROM LIST) UPDATE MAP LIST @ _____ HOUR UPDATE EVERY _____ HOUR, PROMPT Y/N? ANIMATE MAPS Y/N PLAY NAVIGATE MAP Y/N IN OUT GPS LOCATION NORTH / YOUR HEADING ←
---	---

107

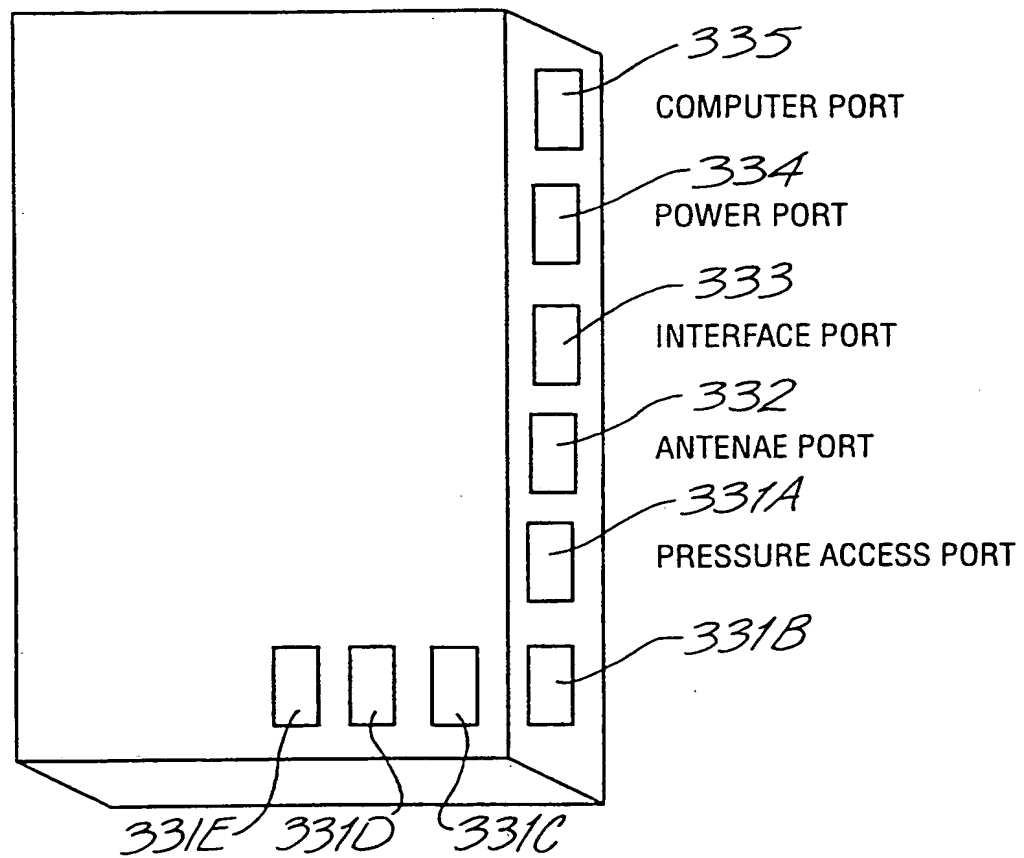


FIGURE 33

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US98/12829

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) :G01C 21/00

US CL :Please See Extra Sheet

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : Please See Extra Sheet.

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
noneElectronic data base consulted during the international search (name of data base and, where practicable, search terms used)
none

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5,335,276 A (THOMPSON et al.) 02 August 1994 (02.08.94), abstract, Figs. 1 and 9d, col. 3, line 7 through col. 5, line 6.	1, 34, 48
A	US 5,528,284 A (STEINER et al.) 18 June 1994 (18.06.94), abstract, Fig. 3, column 6, lines 1-35.	1, 34, 48
A	US 5,627,547 A (RAMASWAMY et al.) 06 MAY 1997 (06.05.97), abstract.	48



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
A document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
E earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	*Z* document member of the same patent family
O document referring to an oral disclosure, use, exhibition or other means	
P document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

20 SEPTEMBER 1998

Date of mailing of the international search report

23 OCT 1998

Name and mailing address of the ISA/US
Commissioner of Patents and Trademarks
Box PCT
Washington, D.C. 20231

Facsimile No. (703) 305-3230

Authorized officer

BILL CUCHLINSKI

Telephone No. (703) 308-1113

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US98/12829

A. CLASSIFICATION OF SUBJECT MATTER:

US CL :

340/944, 945, 961, 971, 979, 988, 89, 990, 995, 286.01, 286.06; 342/352, 357, 457; 701/207, 208, 209, 300, 301, 213;
455/456, 457, 433, 437, 438, 439, 440, 459, 461

B. FIELDS SEARCHED

Minimum documentation searched

Classification System: U.S.

340/944, 945, 961, 971, 979, 988, 89, 990, 995, 286.01, 286.06; 342/352, 357, 457; 701/207, 208, 209, 300, 301, 213;
455/456, 457, 433, 437, 438, 439, 440, 459, 461